


SONUS ROUND 6/18

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

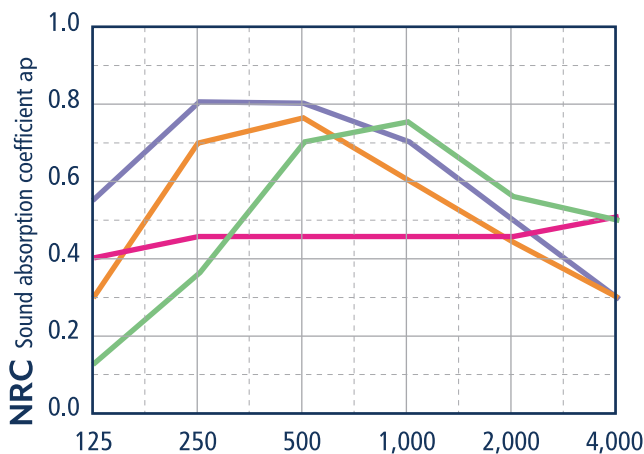

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.35	0.70	0.75	0.55	0.45
Cavity Depth 8" Felt Only	0.30	0.70	0.75	0.60	0.45	0.30
Cavity Depth 16" Felt Only	0.40	0.45	0.45	0.45	0.45	0.50
Cavity Depth 8" with 2" fiberglass	0.55	0.80	0.80	0.70	0.50	0.30

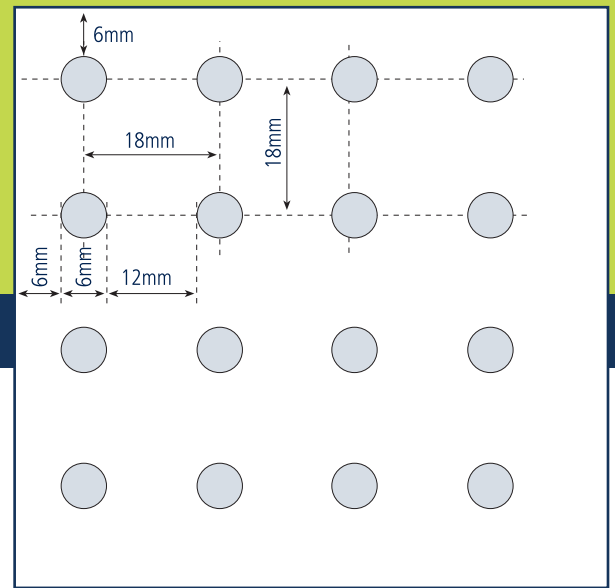

100% size to show pattern

CHARACTERISTICS

Perforation Type:	6mm/18mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	8.7%
Weight:	1.82 lbs / s.f.


AVAILABLE BOARD SIZES

- 1188 mm x 1998 mm (~46.77" x 78.66") ☐
- 1188 mm x 2398 mm (~46.77" x 94.40") ☐
- 1188 mm x 2700 mm (~46.77" x 106.3") ☐

*Limited to stock on hand

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

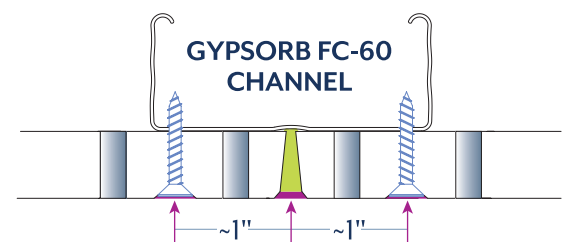


SONUS ROUND 6/18

All Sonos patterns are interchangeable and can be rotated


1998mm x 1188mm (~78.66" x 46.77")
1998 mm (78.66in)

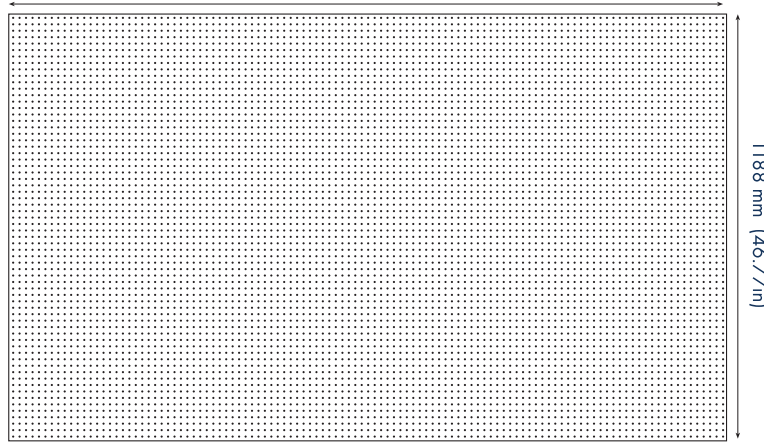

2398mm x 1188mm (~94.40" x 46.77")
2398 mm (94.40in)

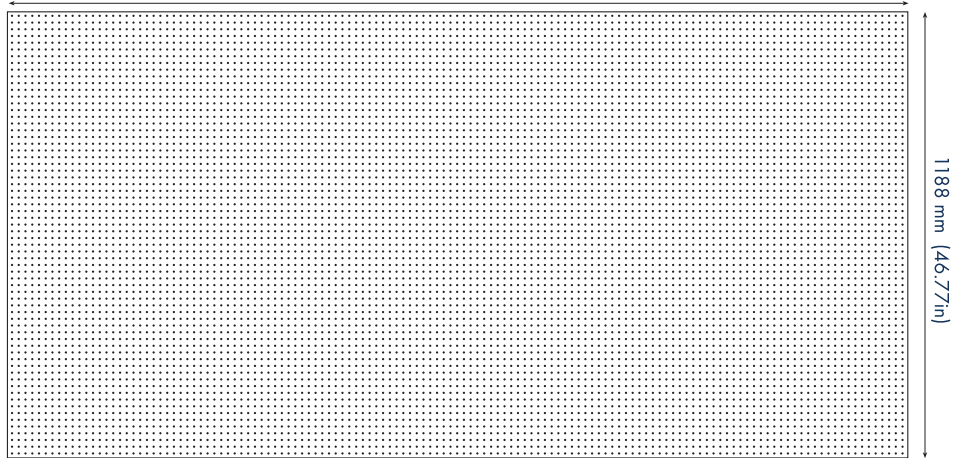

2700mm x 1188mm (~106.49" x 46.77")
2700 mm (106.49in)

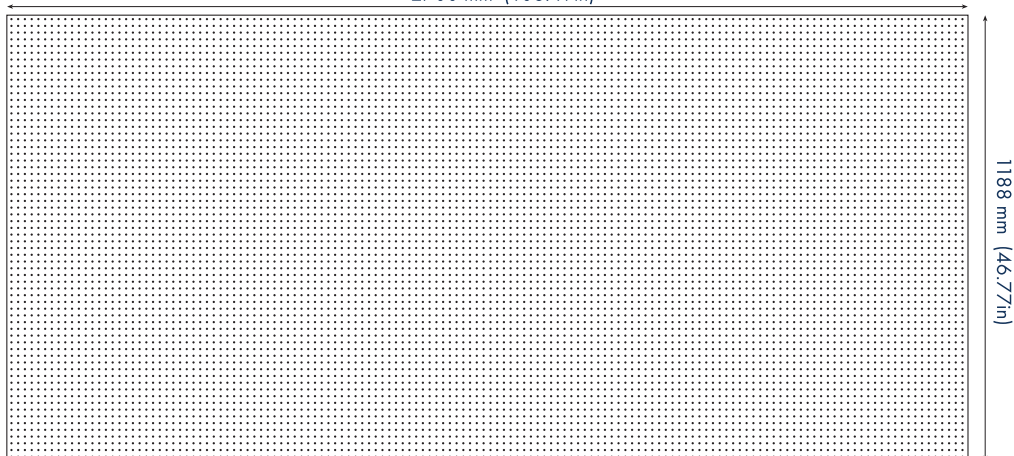


SONUS ROUND 8/18

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

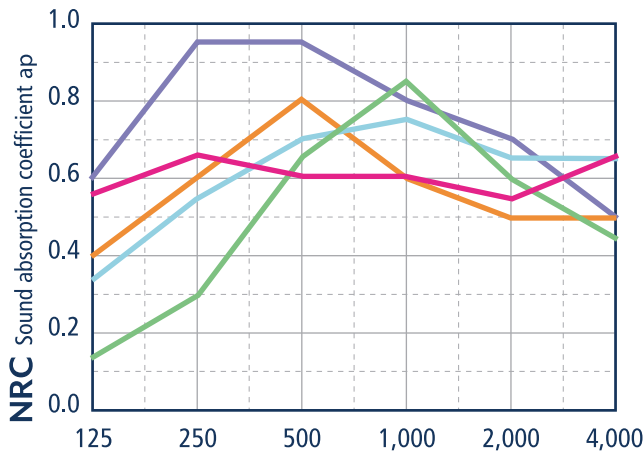

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.30	0.65	0.85	0.60	0.45
Cavity Depth 8" Felt Only	0.40	0.60	0.80	0.60	0.50	0.50
Cavity Depth 16" Felt Only	0.55	0.65	0.60	0.60	0.55	0.65
Cavity Depth 2" with 2" fiberglass	0.35	0.55	0.70	0.75	0.65	0.65
Cavity Depth 8" with 2" fiberglass	0.60	0.95	0.95	0.80	0.70	0.50

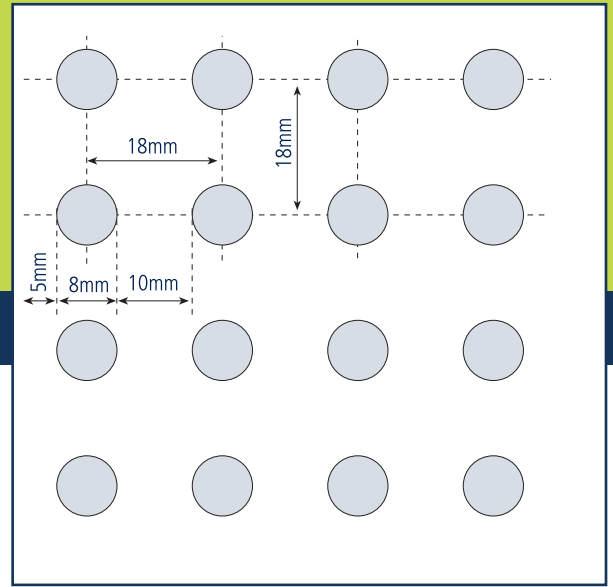

100% size to show pattern

CHARACTERISTICS

Perforation Type:	8mm/18mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	15.5%
Weight:	1.93 lbs / s.f.


AVAILABLE BOARD SIZES

- 1188 mm x 1998 mm (~46.77" x 78.66") ☐
- 1188 mm x 2398 mm (~46.77" x 94.41") ☐
- 1188 mm x 2700 mm (~46.77" x 106.3") ☐
- 900 mm x 2700 mm (~35.43" x 106.3")* ☐

*Limited to stock on hand

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

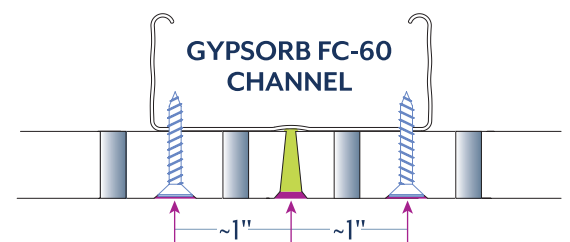


SONUS ROUND 8/18

All Sonos patterns are interchangeable and can be rotated

1188mm x 1998mm (~46.77" x 78.66")

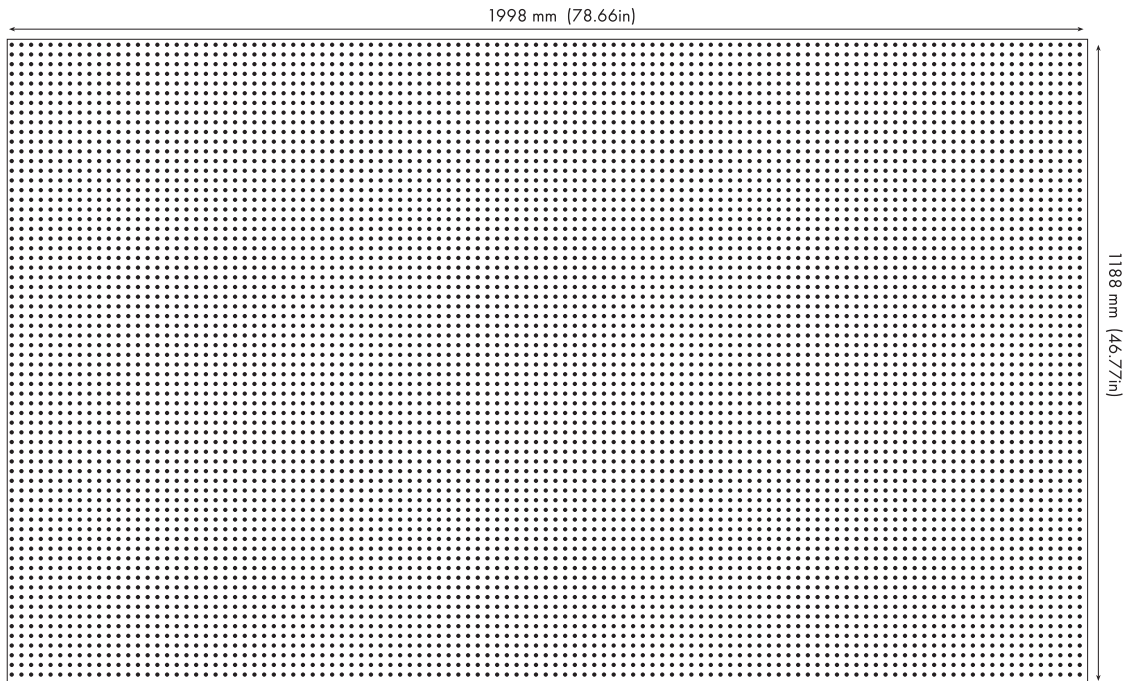

1188mm x 2398mm (~47.77" x 94.41")

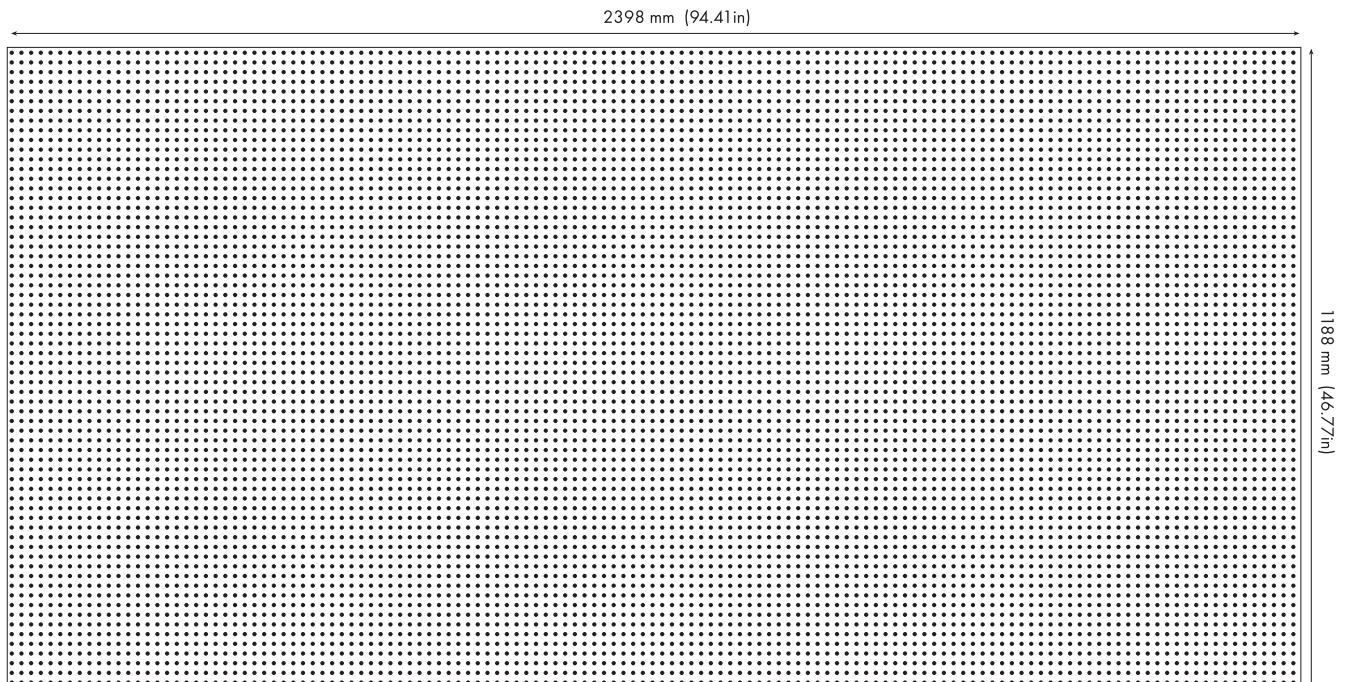


SONUS ROUND 8/18

All Sonos patterns are interchangeable and can be rotated

1188mm x 2700mm (~46.77" x 106.3")


2700 mm (106.3in)

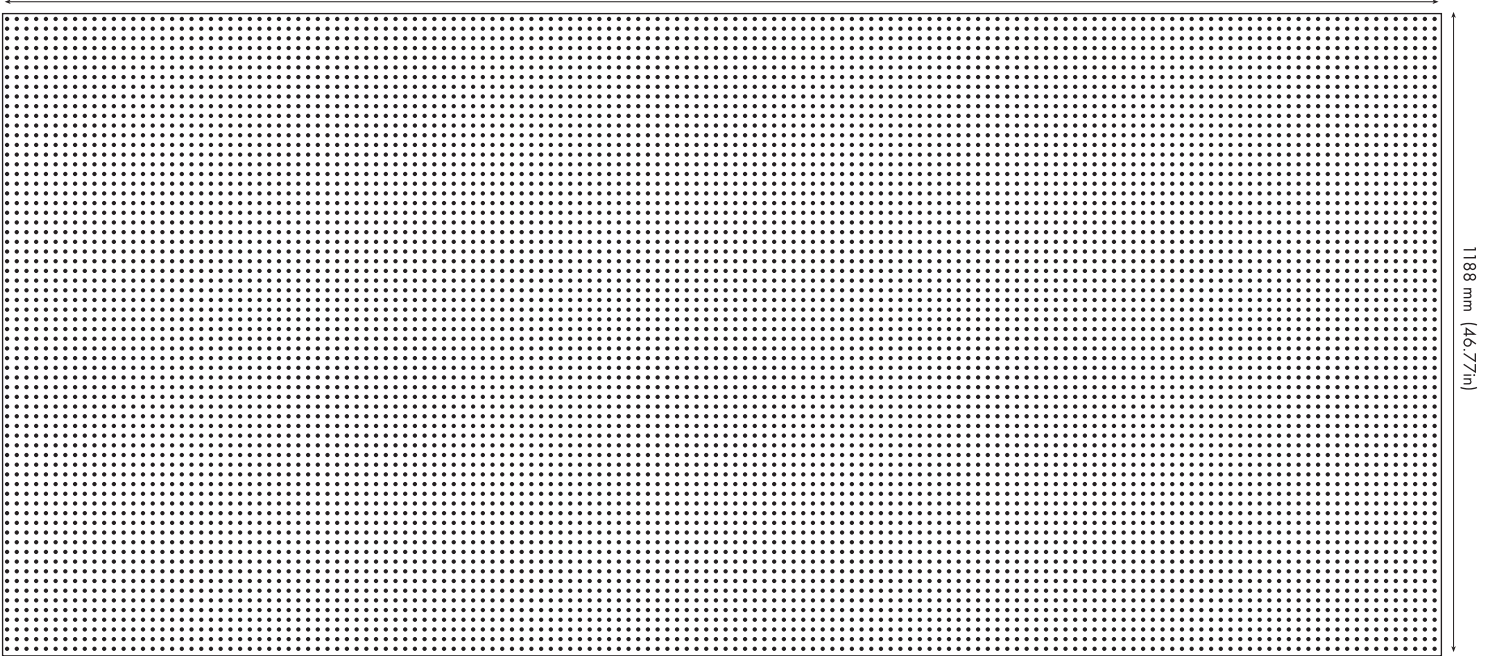

1188 mm (46.77in)

900mm x 2700mm (~35.43" x 106.3")

2700 mm (106.3in)

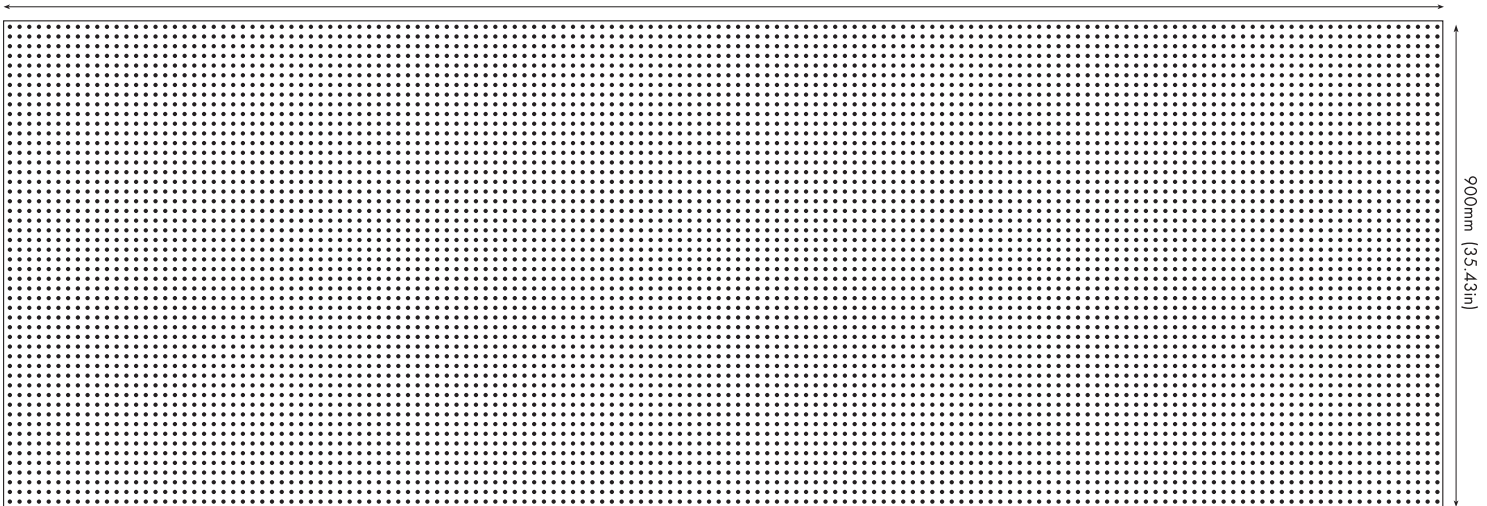


900mm (35.43in)

SONUS ROUND 10/23

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

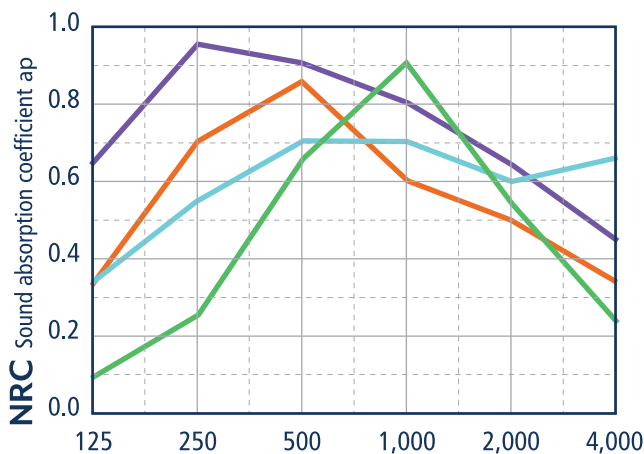

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.10	0.25	0.65	0.90	0.55	0.25
Cavity Depth 8" Felt Only	0.35	0.70	0.85	0.60	0.50	0.35
Cavity Depth 2" with 2" fiberglass	0.35	0.55	0.70	0.70	0.60	0.65
Cavity Depth 8" with 2" fiberglass	0.55	0.95	0.90	0.80	0.65	0.45

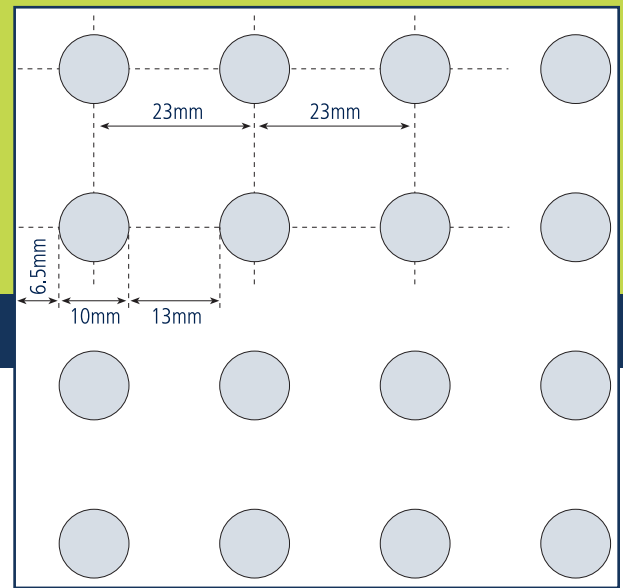

100% size to show pattern

CHARACTERISTICS


Perforation Type:	10mm/23mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	14.8%
Weight:	1.75 lbs / s.f.

AVAILABLE BOARD SIZES

- 1196 mm x 2001 mm (~47.09" x 78.78") ☐
- 1196 mm x 2392 mm (~47.09" x 94.17") ☐
- 1196 mm x 2691 mm (~47.09" x 105.94") ☐

JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

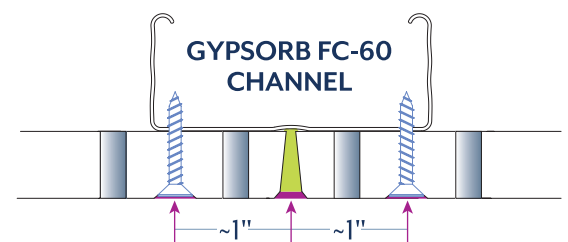


SONUS ROUND 10/23

All Sonos patterns are interchangeable and can be rotated

1196mm x 2001mm (~47.09" x 78.78")


2001mm (78.78in)

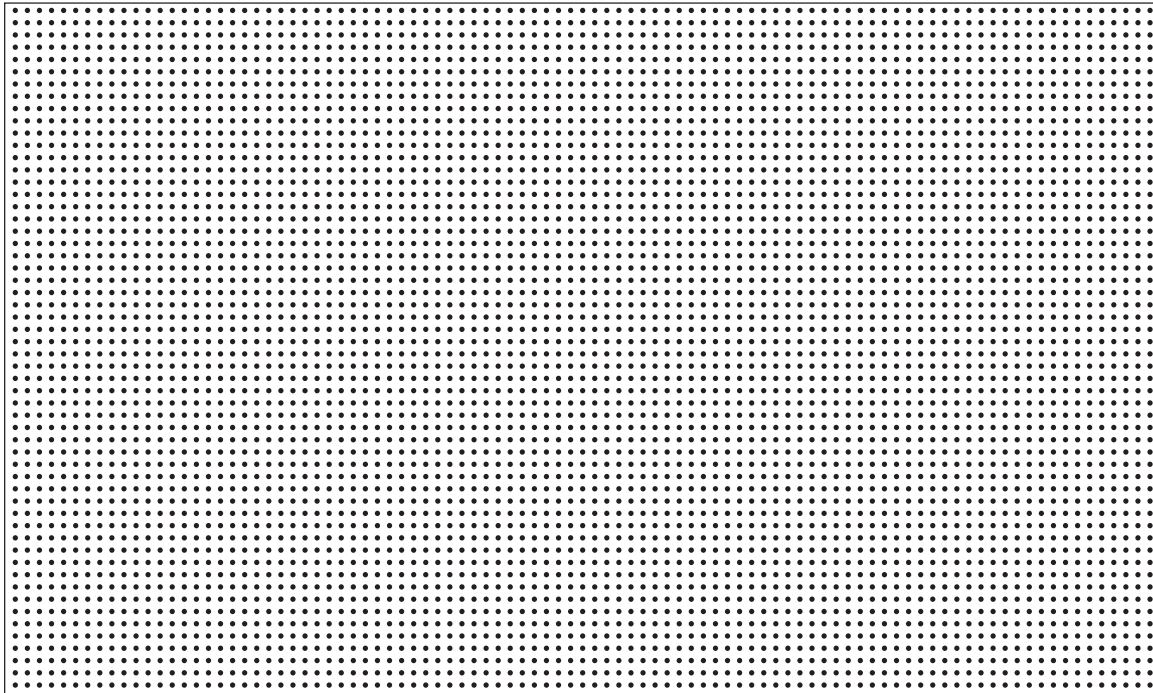

1196 mm (47.09in)

1196mm x 2392mm (~47.09" x 94.17")

2392 mm (94.17in)

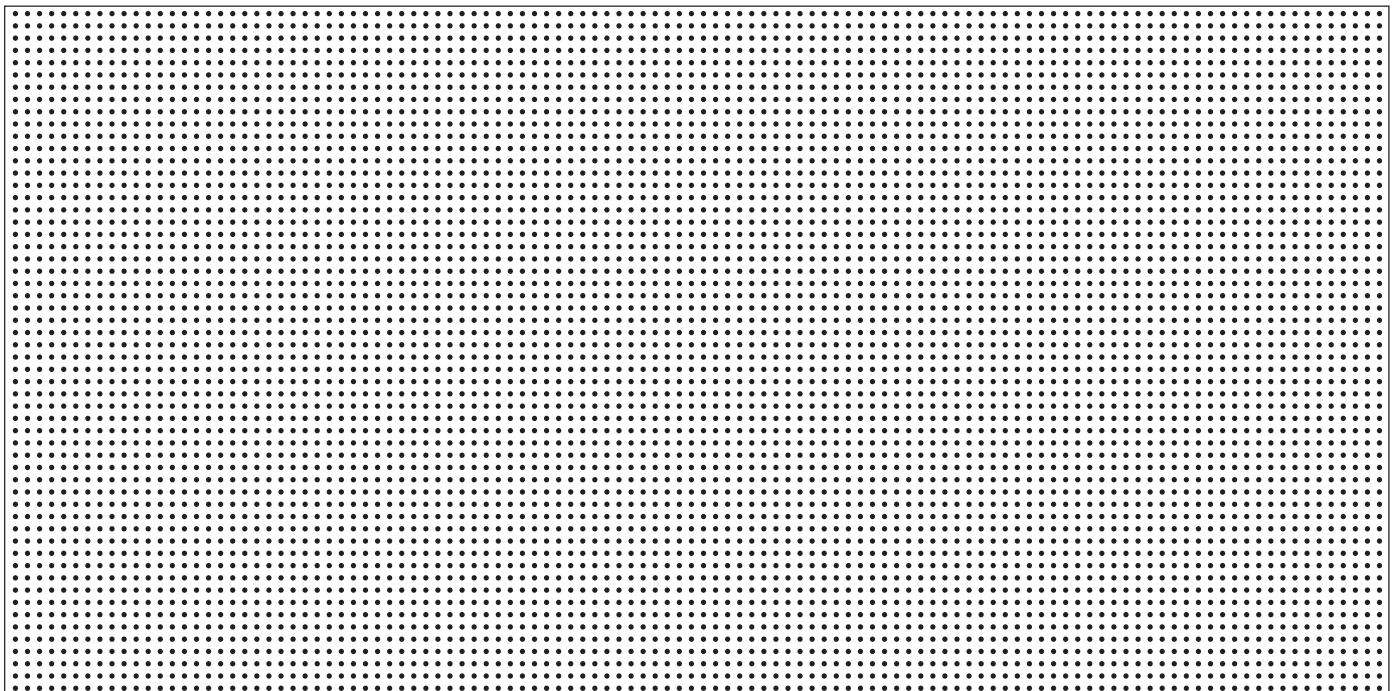


1196mm (47.09in)

SONUS ROUND 10/23

All Sonos patterns are interchangeable and can be rotated

1196mm x 2691mm (~47.09" x 105.94")

2691 mm (105.94in)

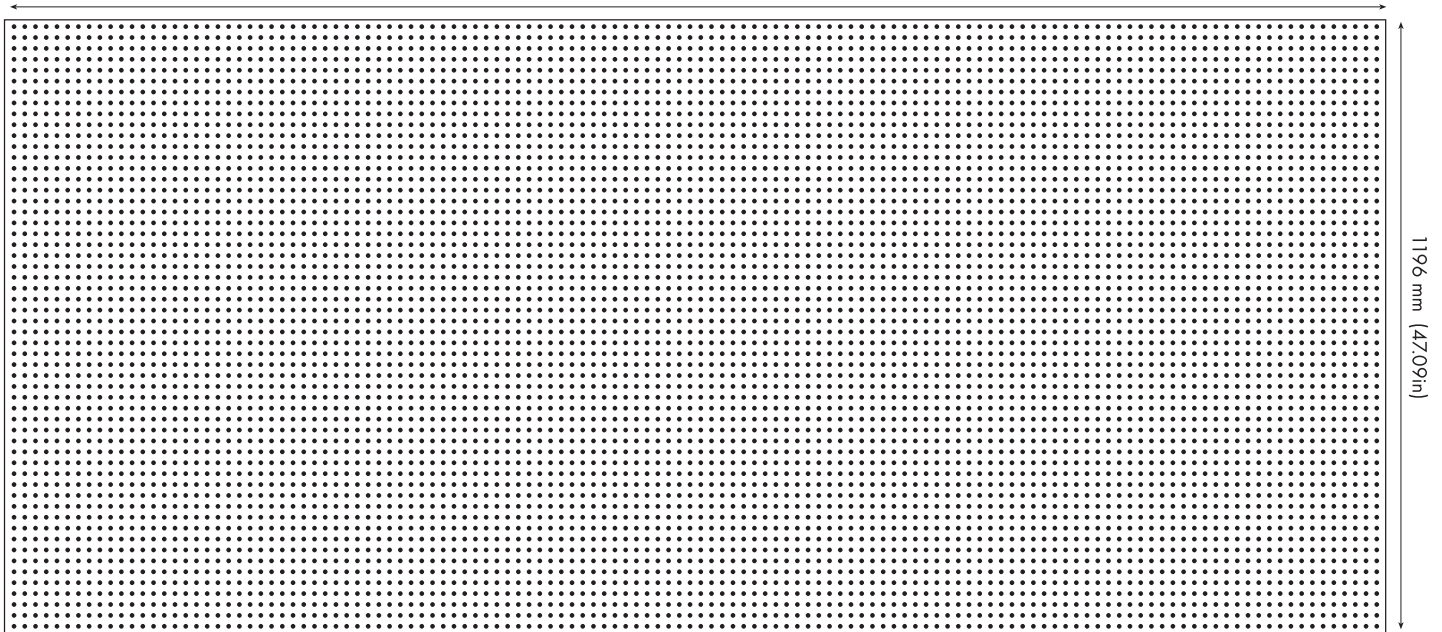


SONUS SOUND 12/25

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

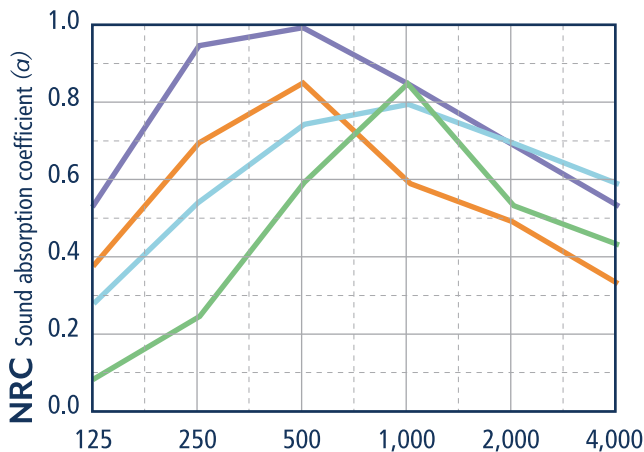

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.10	0.25	0.60	0.85	0.55	0.45
Cavity Depth 8" Felt Only	0.40	0.70	0.85	0.60	0.50	0.35
Cavity Depth 2" with 2" fiberglass	0.30	0.55	0.75	0.80	0.70	0.60
Cavity Depth 8" with 2" fiberglass	0.55	0.95	1.00	0.85	0.70	0.55

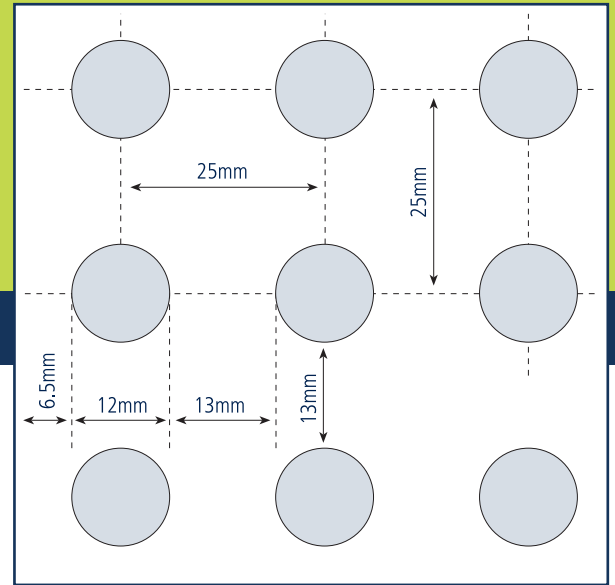

100% size to show pattern

CHARACTERISTICS


Perforation Type:	12mm/25mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	18.1%
Weight:	1.75 lbs / s.f.

AVAILABLE BOARD SIZES

- 1200mm x 2000mm (~47.24" x 78.74") ☐
- 1200mm x 2400mm (~47.24" x 94.49") ☐
- 1200mm x 2700mm (~47.24" x 106.3") ☐

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

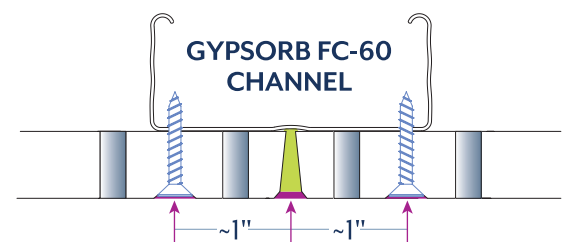


SONUS SOUND 12/25

All Sonos patterns are interchangeable and can be rotated

1200mm x 2000mm (~47.24" x 78.74")

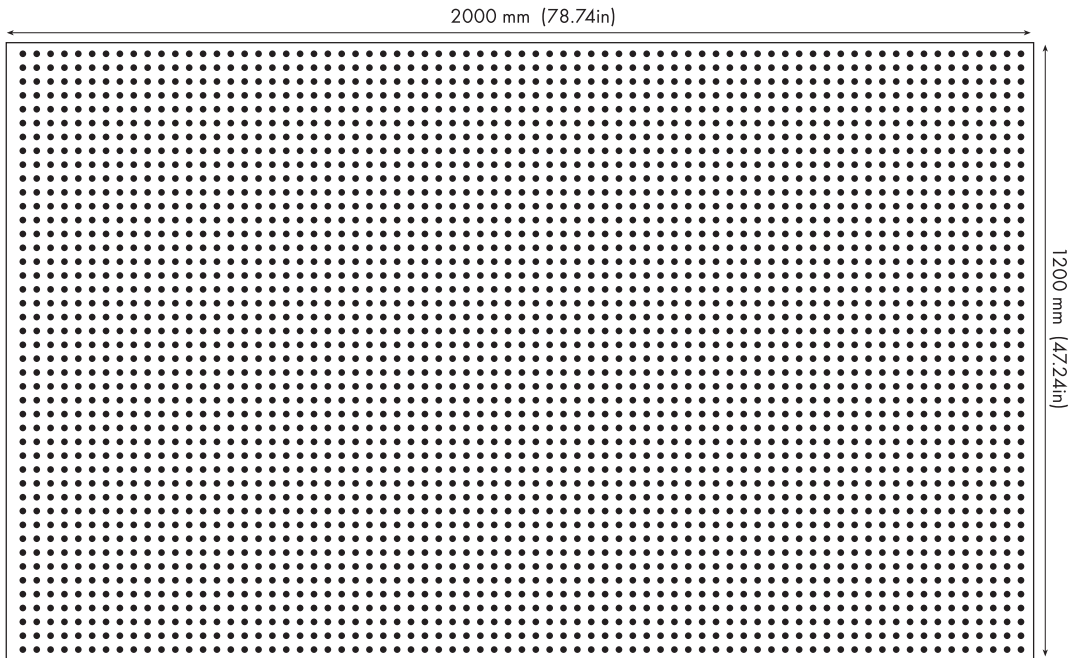

1200mm x 2400mm (~47.24" x 94.48")

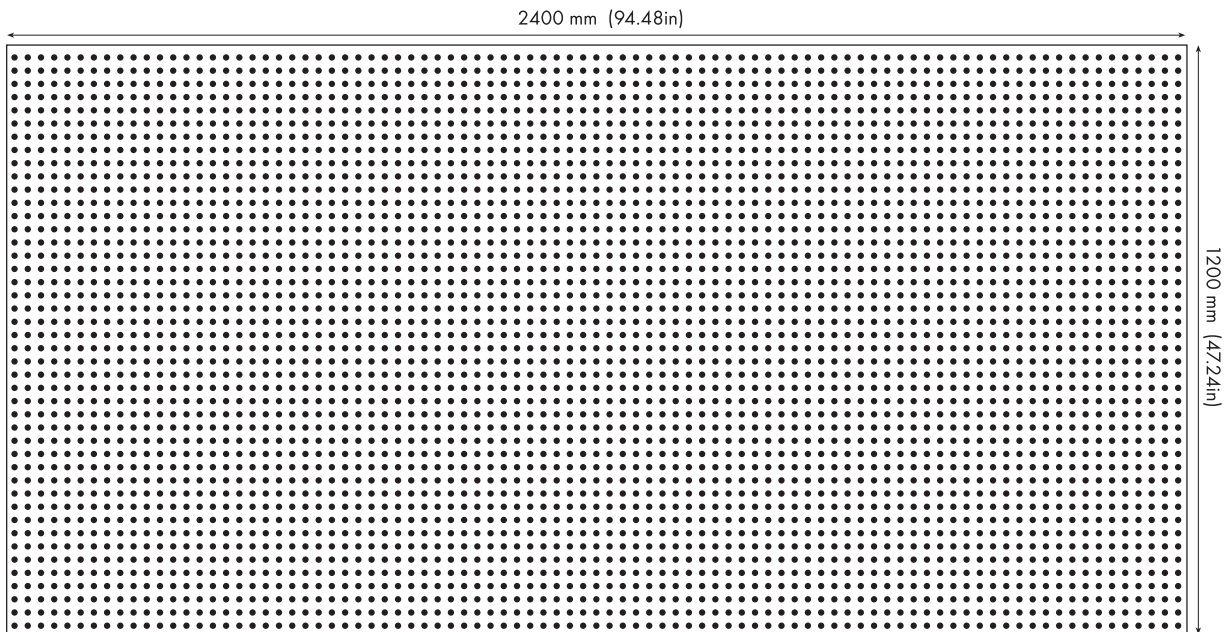


SONUS SOUND 12/25

All Sonos patterns are interchangeable and can be rotated

1200mm x 2700mm (~47.24" x 106.3")

2700 mm (106.49in)

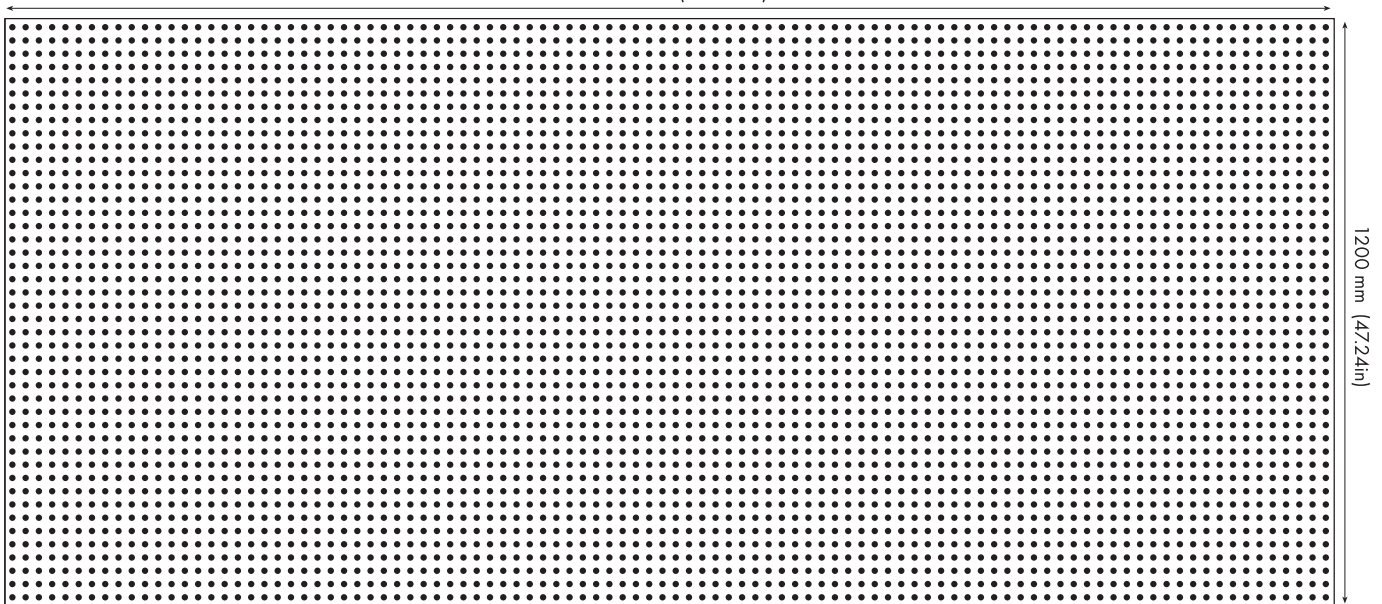


SONUS ROUND 15/30

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

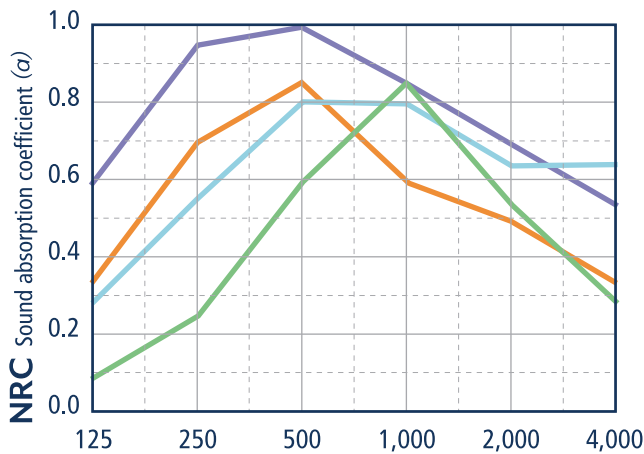

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.10	0.25	0.60	0.85	0.55	0.30
Cavity Depth 8" Felt Only	0.35	0.70	0.85	0.60	0.50	0.35
Cavity Depth 2" with 2" fiberglass	0.30	0.55	0.80	0.80	0.65	0.65
Cavity Depth 8" with 2" fiberglass	0.60	0.95	1.00	0.85	0.70	0.55

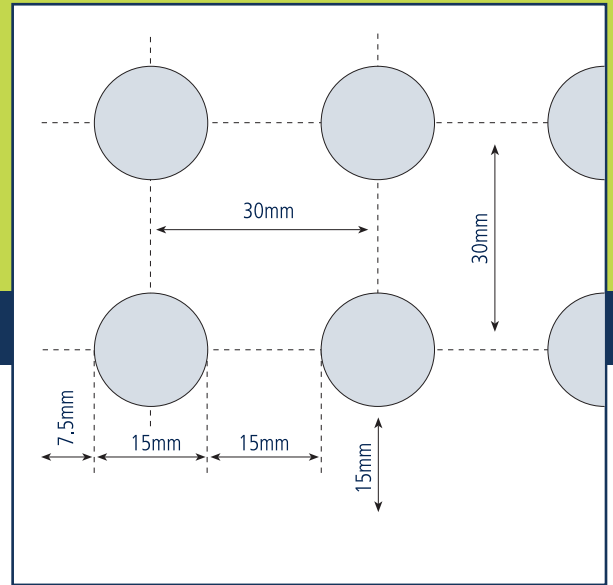

100% size to show pattern

CHARACTERISTICS

Perforation Type:	15mm/30mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	19.6%
Weight:	1.82 lbs / s.f.


AVAILABLE BOARD SIZES

- 900 mm x 2700 mm (~35.43" x 106.3")* ☐
- 1200 mm x 1980 mm (~47.24" x 77.95") ☐
- 1200 mm x 2400 mm (~47.24" x 94.48") ☐
- 1200 mm x 2700 mm (~47.24" x 106.3") ☐

*Limited to stock on hand

JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

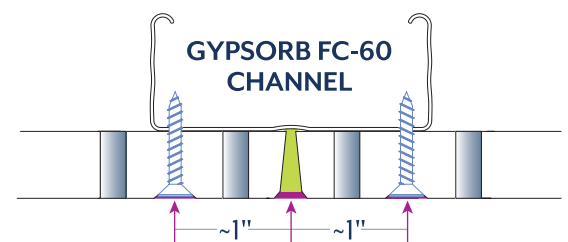


SONUS ROUND 15/30

All Sonos patterns are interchangeable and can be rotated


900mm x 2700mm (~35.43" x 106.3")

2700 mm (106.3in)

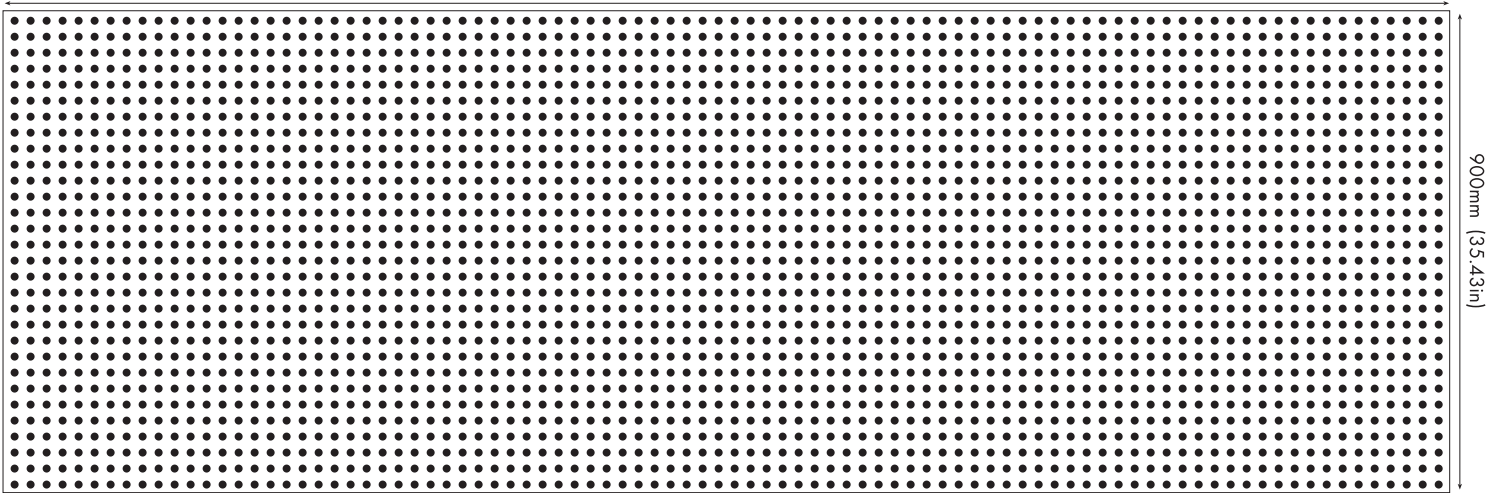

1200mm x 1980mm (~47.24" x 77.95")

1980 mm (77.95in)

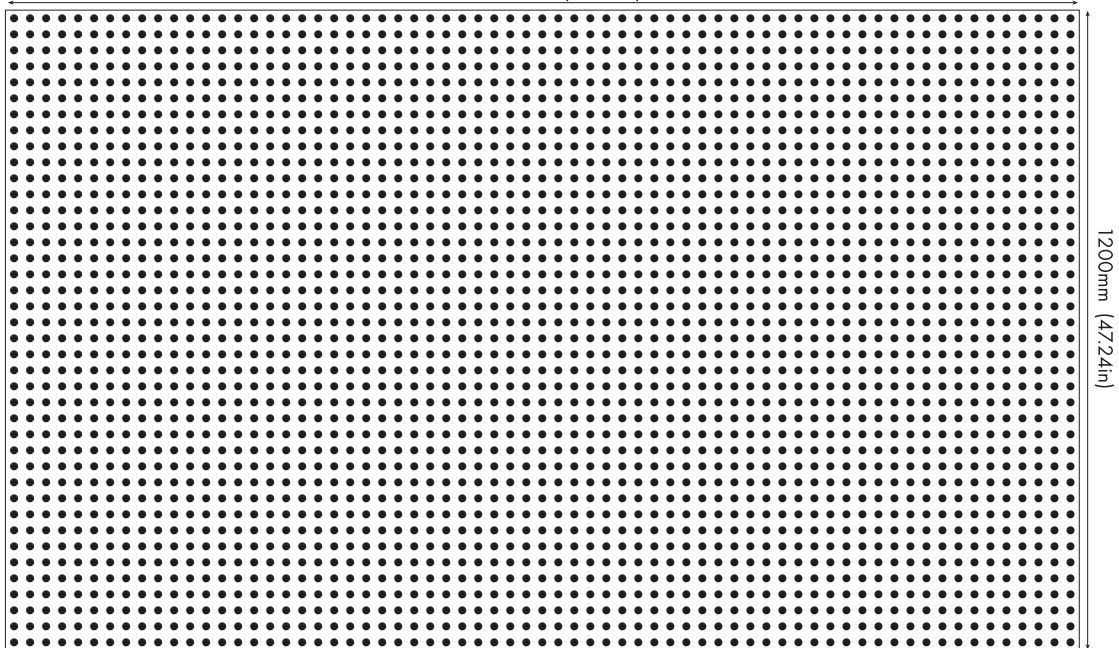


SONUS ROUND 15/30

All Sonos patterns are interchangeable and can be rotated


1200mm x 2400mm (~47.24" x 94.48")

2400 mm (94.48in)

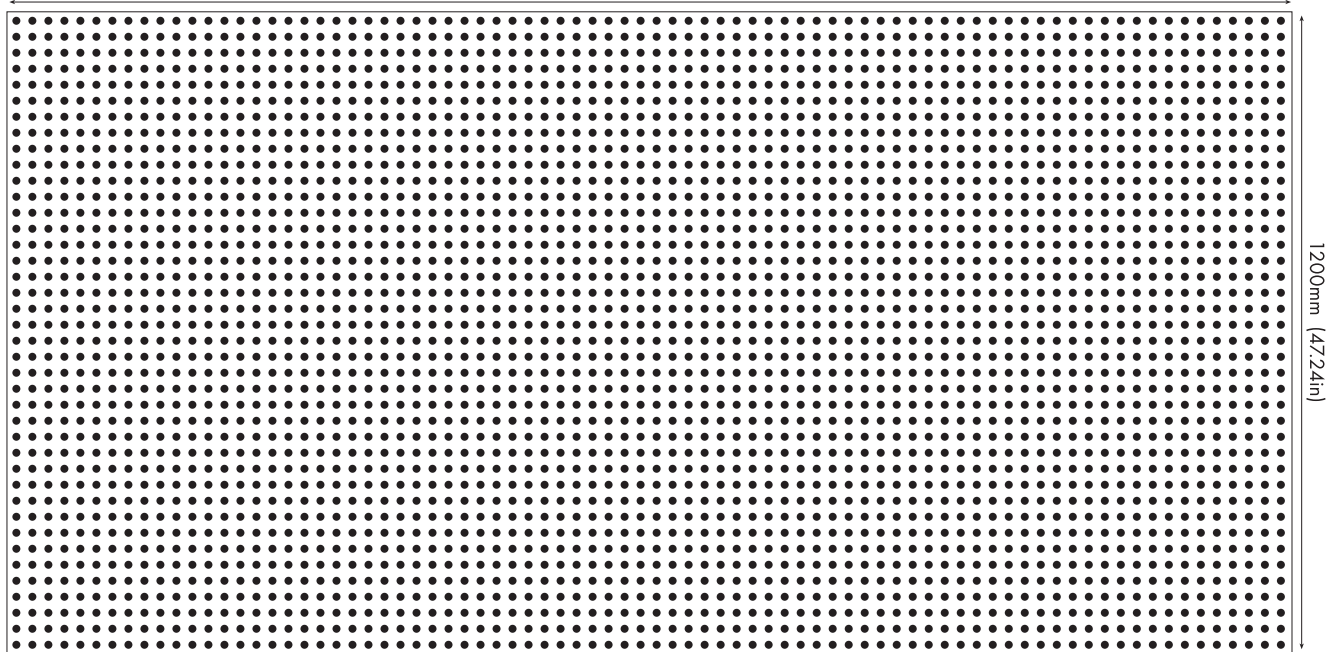

1200mm x 2700mm (~47.24" x 106.3")

2700 mm (106.3in)

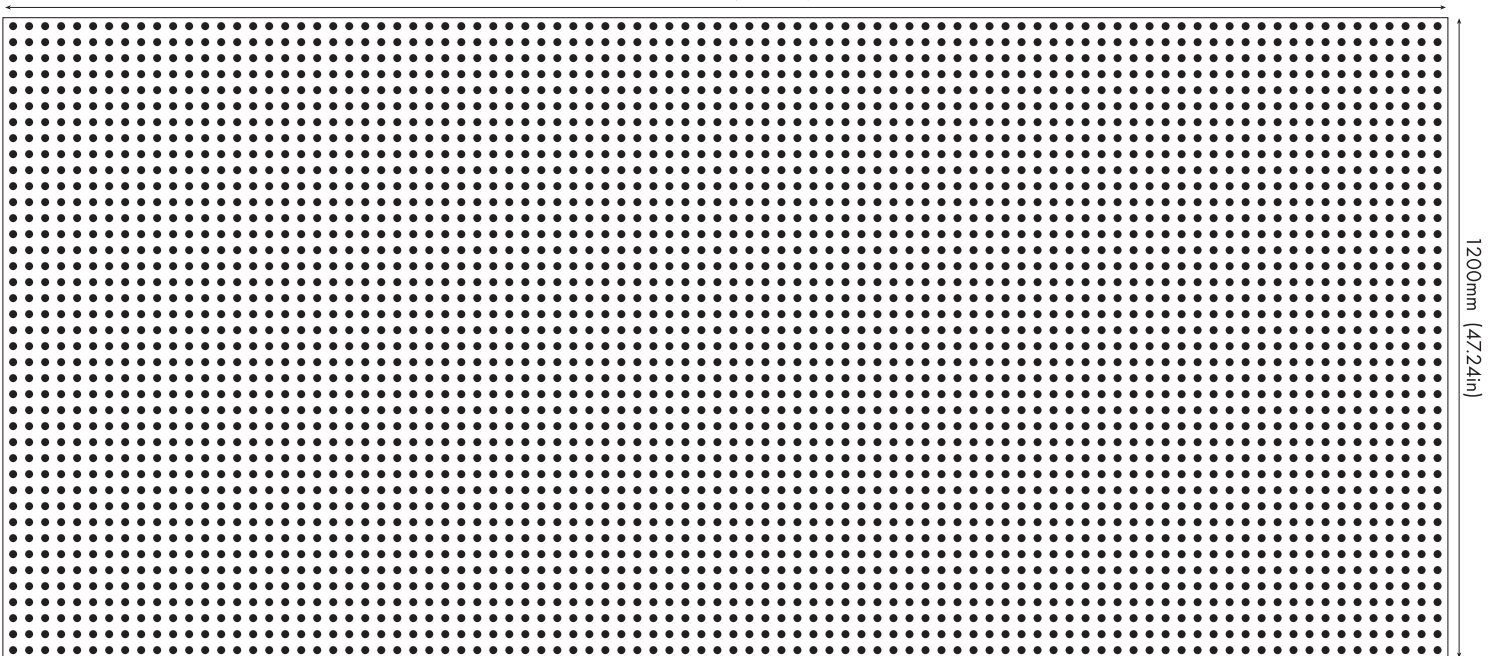


SONUS SQUARE 8/18

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

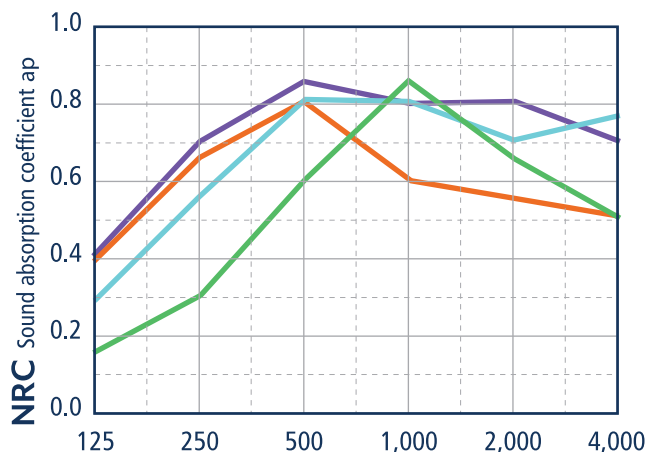

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.25	0.60	0.85	0.50	0.40
Cavity Depth 8" Felt Only	0.40	0.65	0.80	0.60	0.55	0.50
Cavity Depth 2" with 2" fiberglass	0.30	0.55	0.80	0.80	0.70	0.75
Cavity Depth 8" with 2" fiberglass	0.40	0.70	0.85	0.80	0.80	0.70

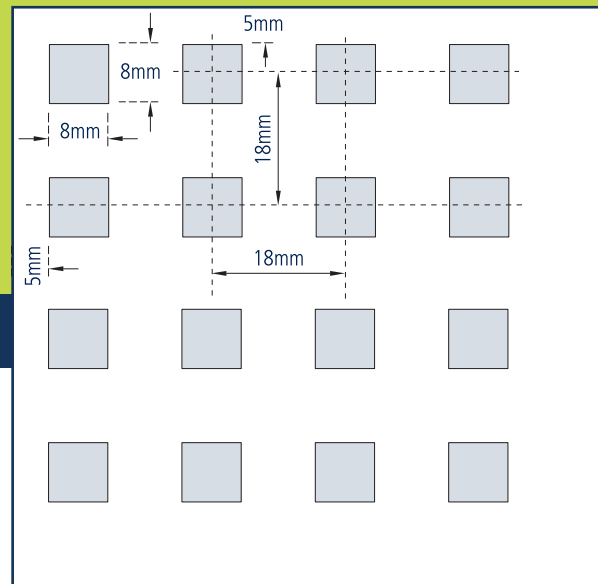

100% size to show pattern

CHARACTERISTICS

Perforation Type:	8mm/18mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	19.8%
Weight:	1.82 lbs / s.f.


AVAILABLE BOARD SIZES

- 1188 mm x 1998 mm (~46.77" x 78.66") ☐
- 1188 mm x 2398 mm (~46.77" x 94.40") ☐
- 1188 mm x 2700 mm (~46.77" x 106.3") ☐
- 900 mm x 2700 mm (~35.43" x 106.3")* ☐

*Limited to stock on hand

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

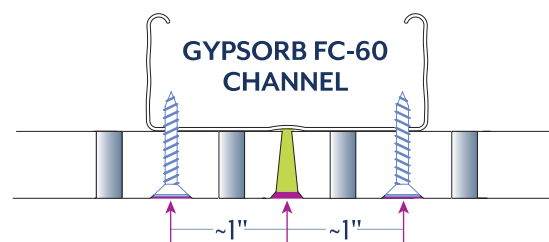


SONUS SQUARE 8/18

All Sonos patterns are interchangeable and can be rotated

1998mm x 1188mm (~78.66" x 46.77")

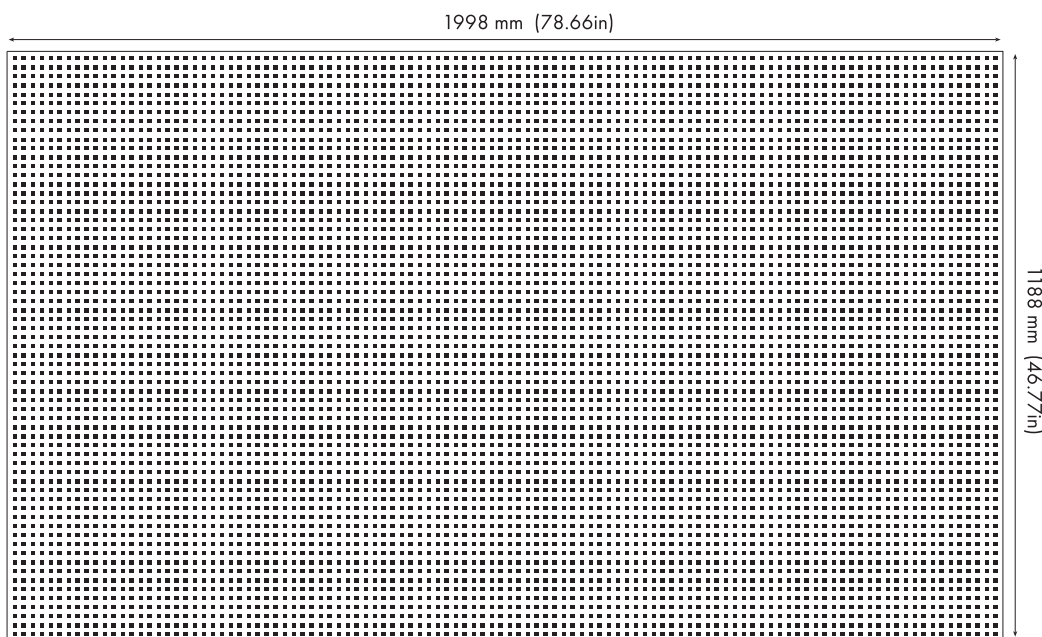


2398mm x 1188mm (~94.40" x 46.77")

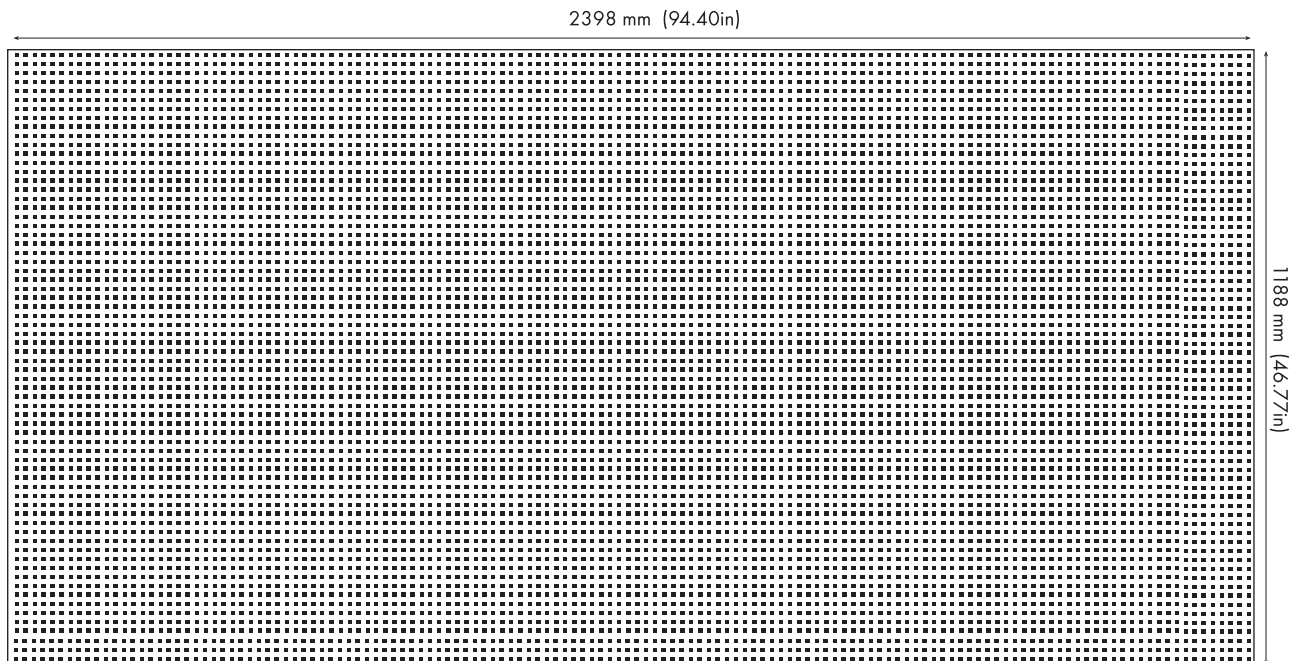


SONUS SQUARE 8/18

All Sonos patterns are interchangeable and can be rotated

2700mm x 1188mm (~106.49" x 46.77")

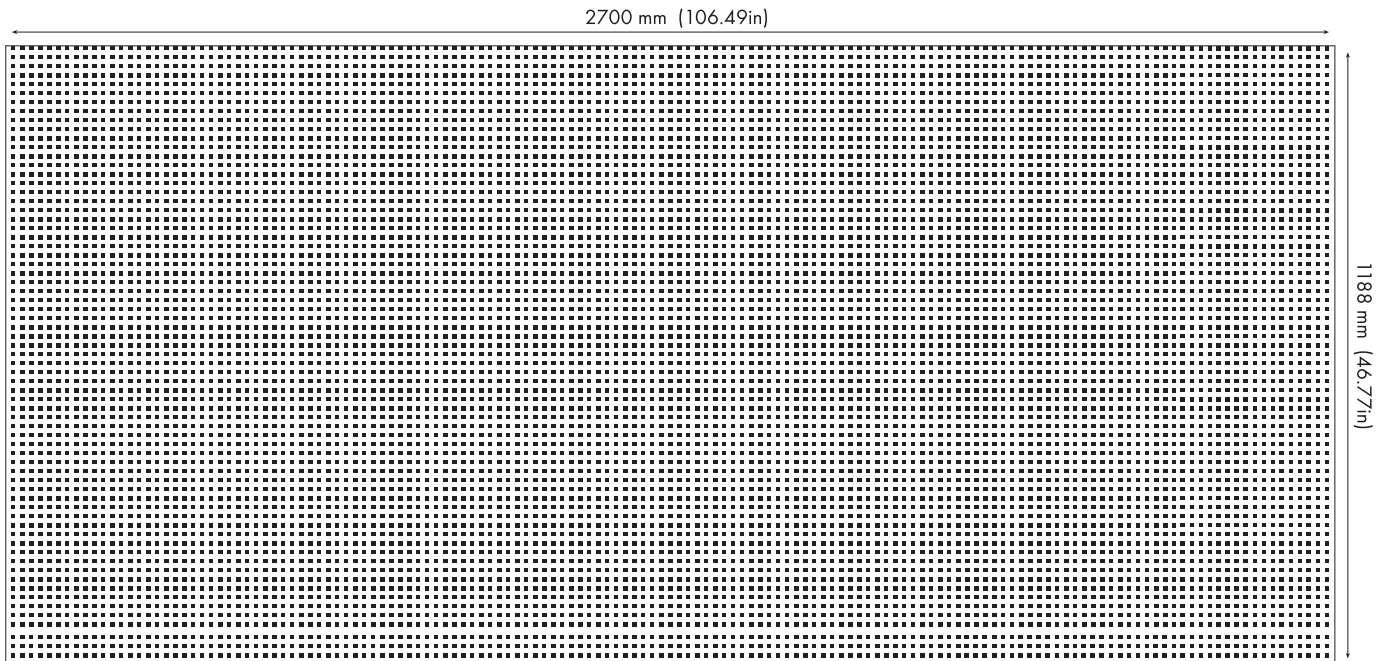

900mm x 2700mm (~35.43" x 106.3")

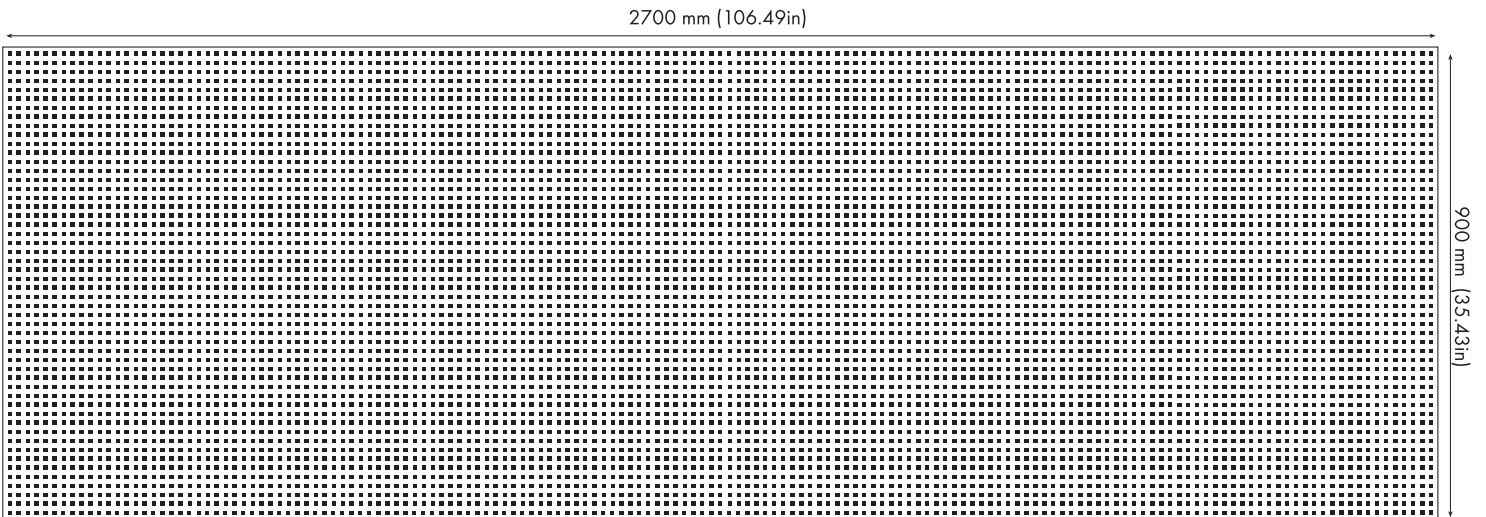


SONUS SQUARE 12/25

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

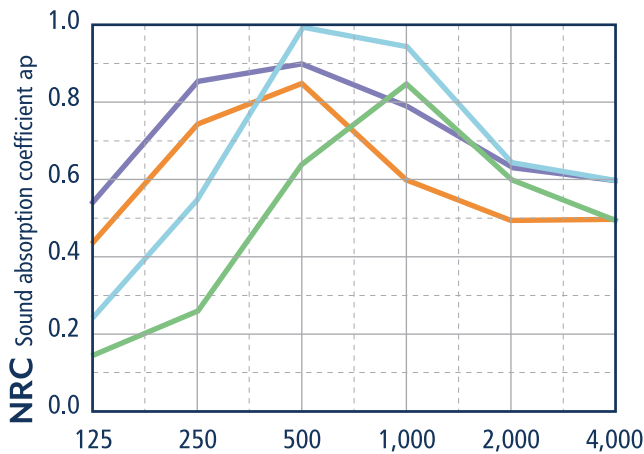

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.25	0.65	0.85	0.60	0.50
Cavity Depth 8" Felt Only	0.45	0.75	0.85	0.60	0.50	0.50
Cavity Depth 2" with 2" fiberglass	0.25	0.55	1.00	0.95	0.65	0.60
Cavity Depth 8" with 2" fiberglass	0.55	0.85	0.90	0.80	0.65	0.60

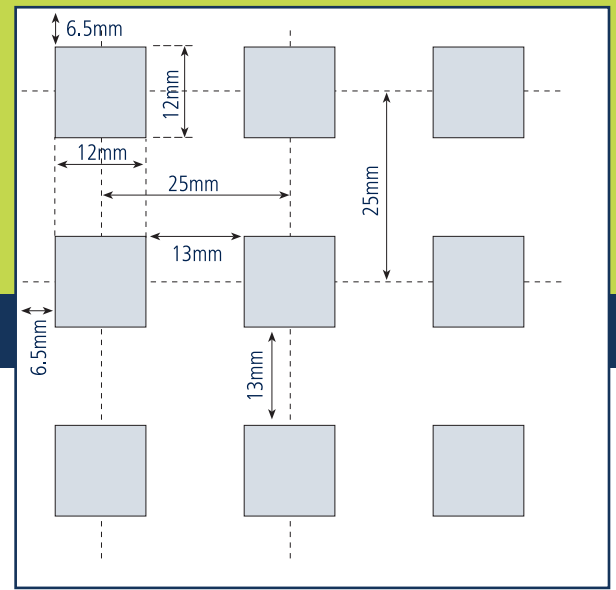

100% size to show pattern

CHARACTERISTICS

Perforation Type:	12mm/25mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	23.0%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 1200 mm x 2000 mm (~47.24" x 78.74") ☐
- 1200 mm x 2400 mm (~47.24" x 94.49") ☐
- 1200 mm x 2700 mm (~47.24" x 106.3") ☐
- 900 mm x 2700 mm (~35.43" x 106.3")* ☐

*Limited to stock on hand

JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

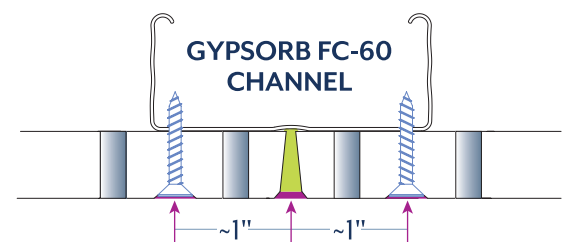


SONUS SQUARE 12/25

All Sonos patterns are interchangeable and can be rotated


1200mm x 2000mm (~47.24" x 78.74")

2000 mm (78.74in)

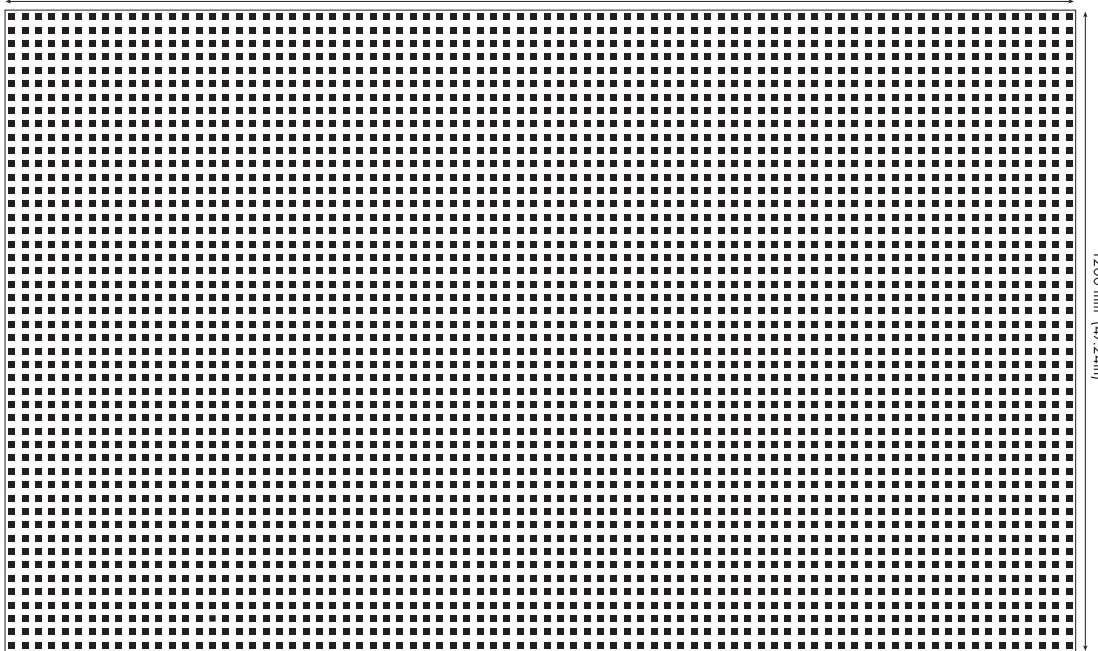

1200mm x 2400mm (~47.24" x 94.48")

2400 mm (94.48in)

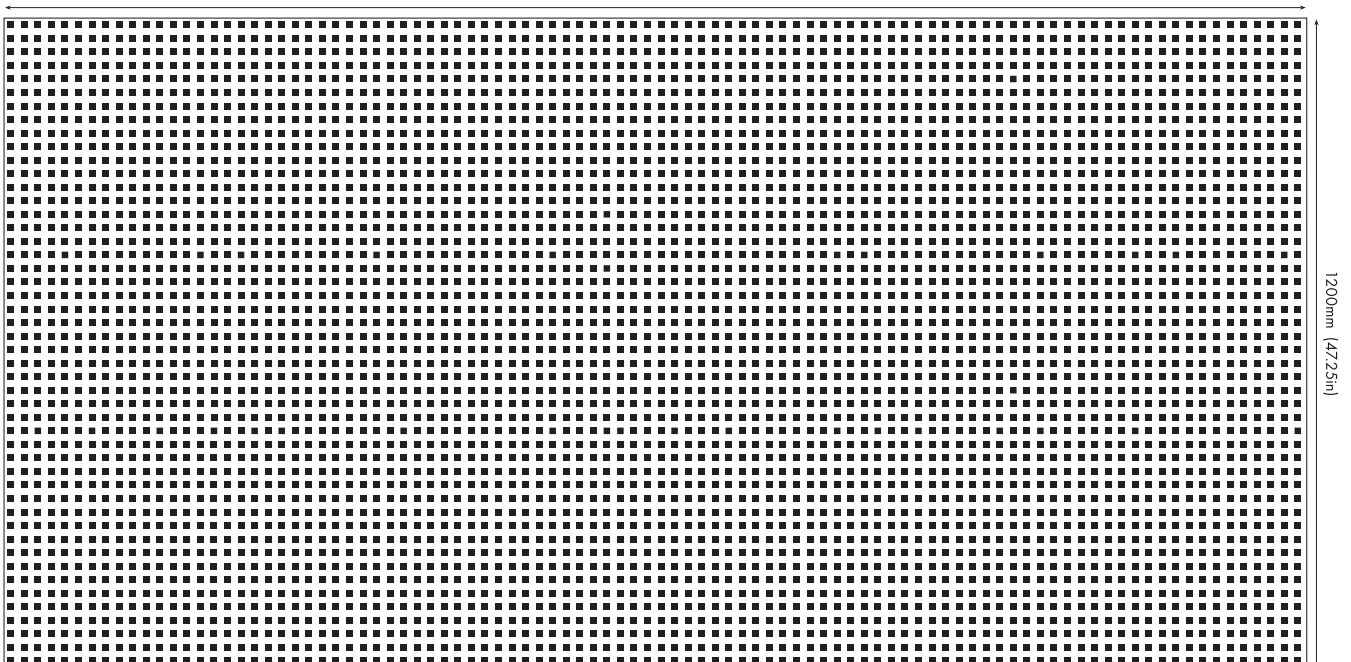


SONUS SQUARE 12/25

All Sonos patterns are interchangeable and can be rotated


1200mm x 2700mm (~47.24" x 106.3")

2700 mm (106.3in)

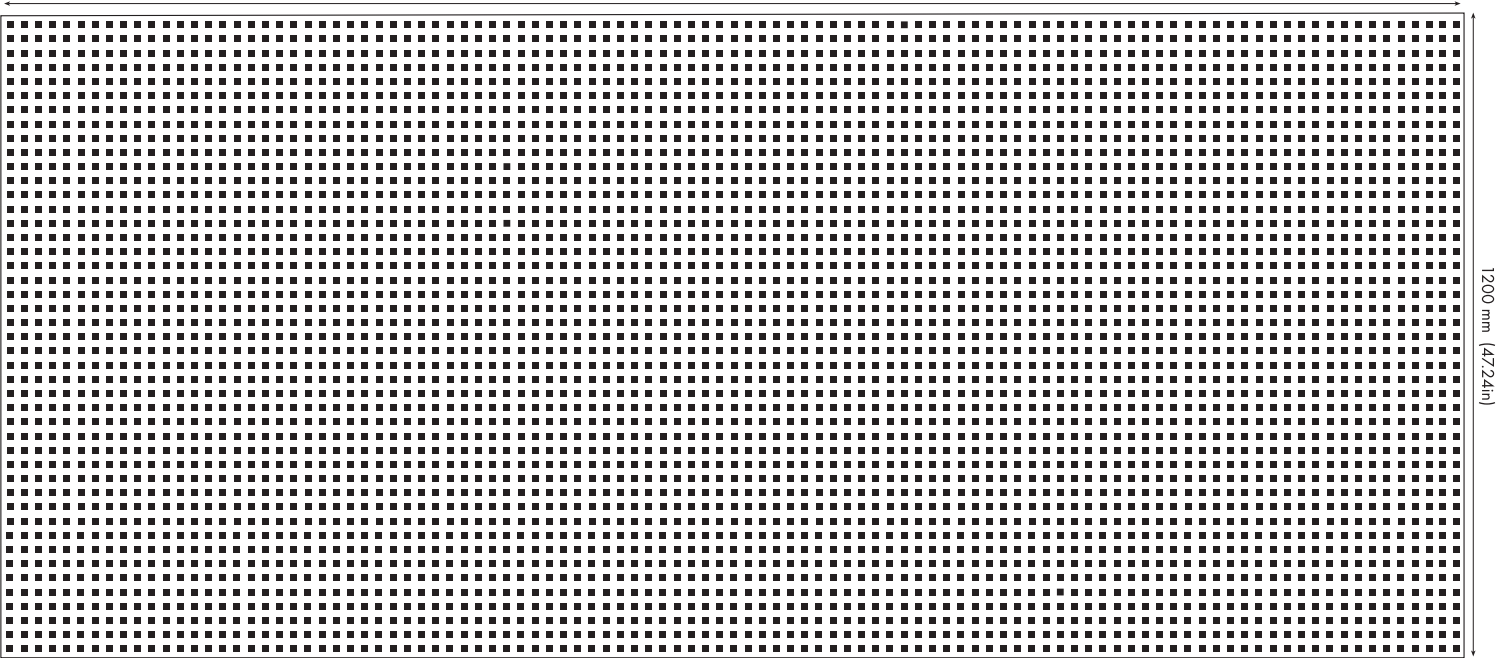

900mm x 2700mm (~35.43" x 106.3")

2700 mm (106.3in)

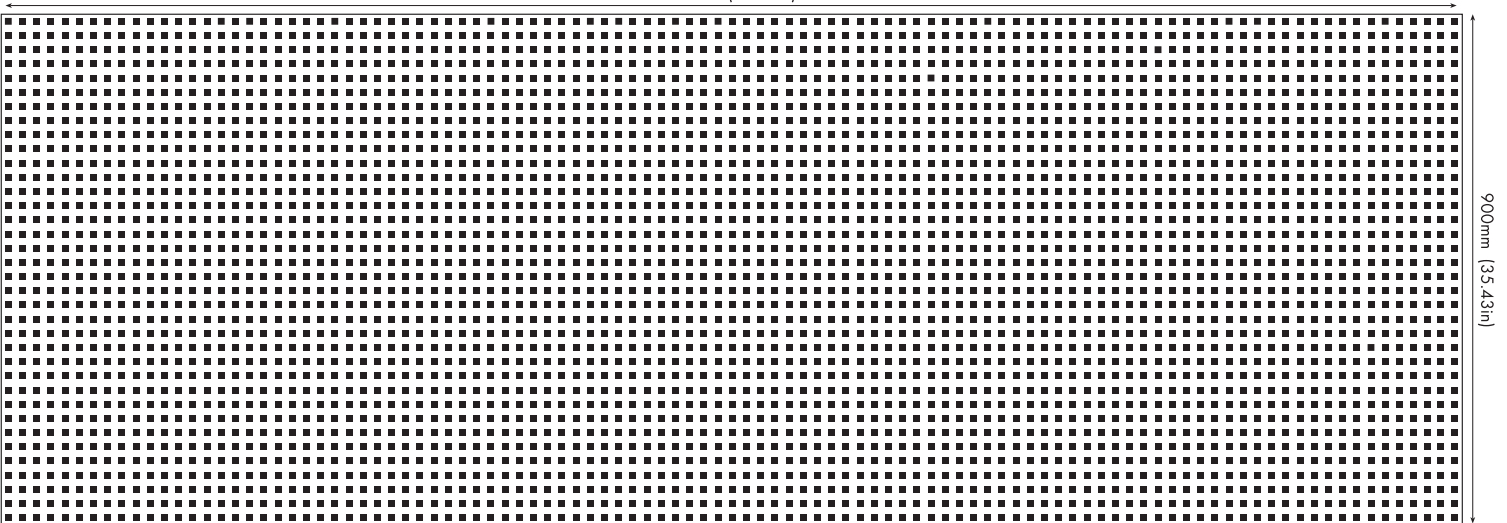


SONUS COMPOSITE 8/12/50

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

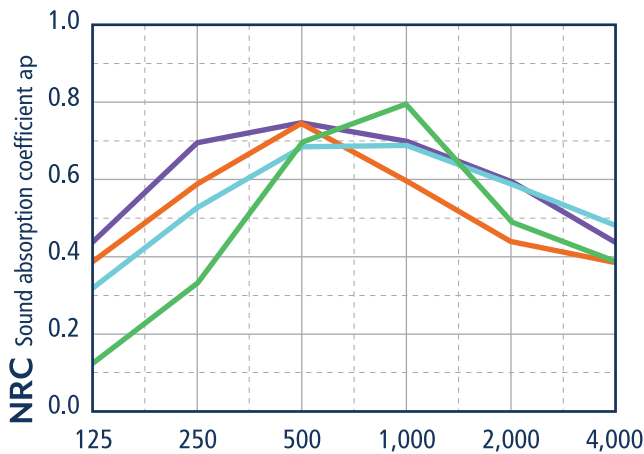

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.35	0.70	0.80	0.50	0.40
Cavity Depth 8" Felt Only	0.40	0.65	0.75	0.60	0.45	0.40
Cavity Depth 2" with 2" fiberglass	0.35	0.55	0.70	0.70	0.60	0.50
Cavity Depth 8" with 2" fiberglass	0.45	0.70	0.75	0.70	0.60	0.45

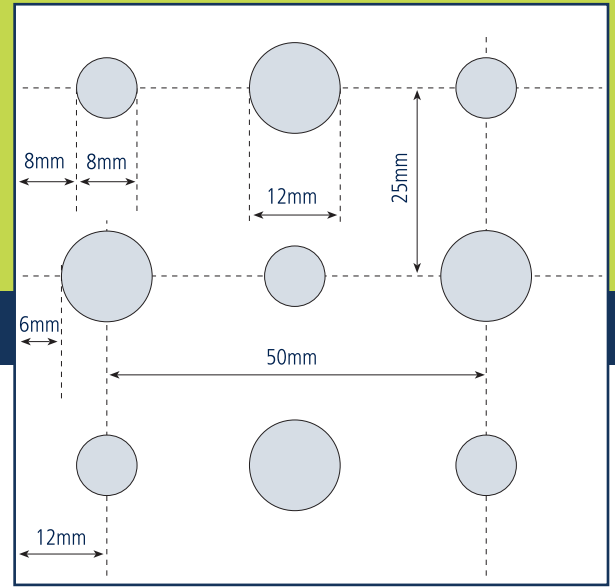

100% size to show pattern

CHARACTERISTICS

Perforation Type:	8mm/12mm/50mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	13.1%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 900mm x 2700mm (~35.43" x 106.49")* ☐
- 1200mm x 2000mm (~47.24" x 78.74") ☐
- 1200mm x 2400mm (~47.24" x 94.49") ☐
- 1200mm x 2700mm (~47.24" x 106.49") ☐

*Limited to stock on hand

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

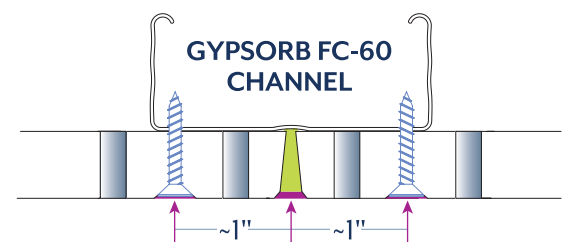


SONUS COMPOSITE 8/12/50

All Sonos patterns are interchangeable and can be rotated

1200mm x 2000mm (~47.24" x 78.74")

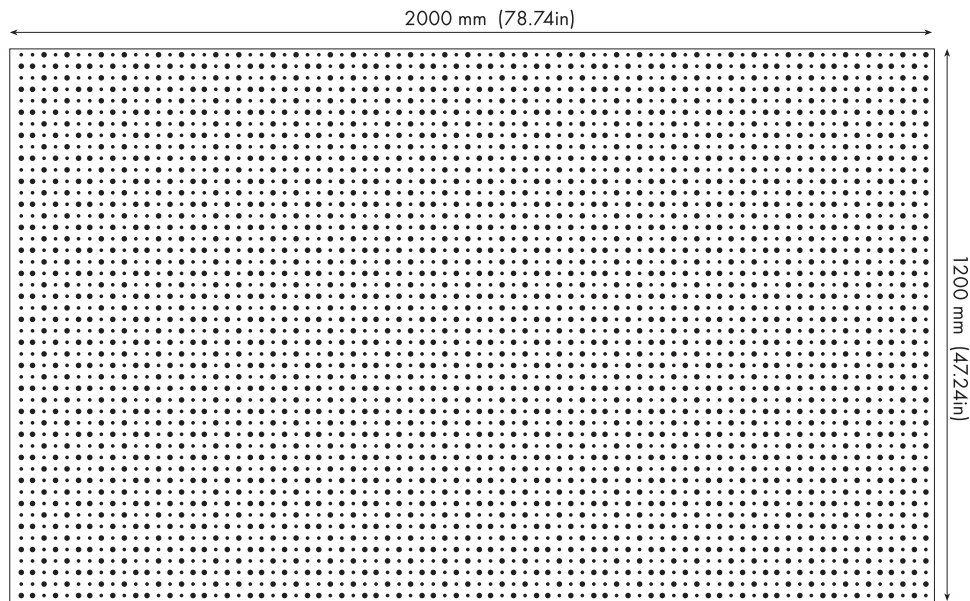


1200mm x 2400mm (~47.24" x 94.48")

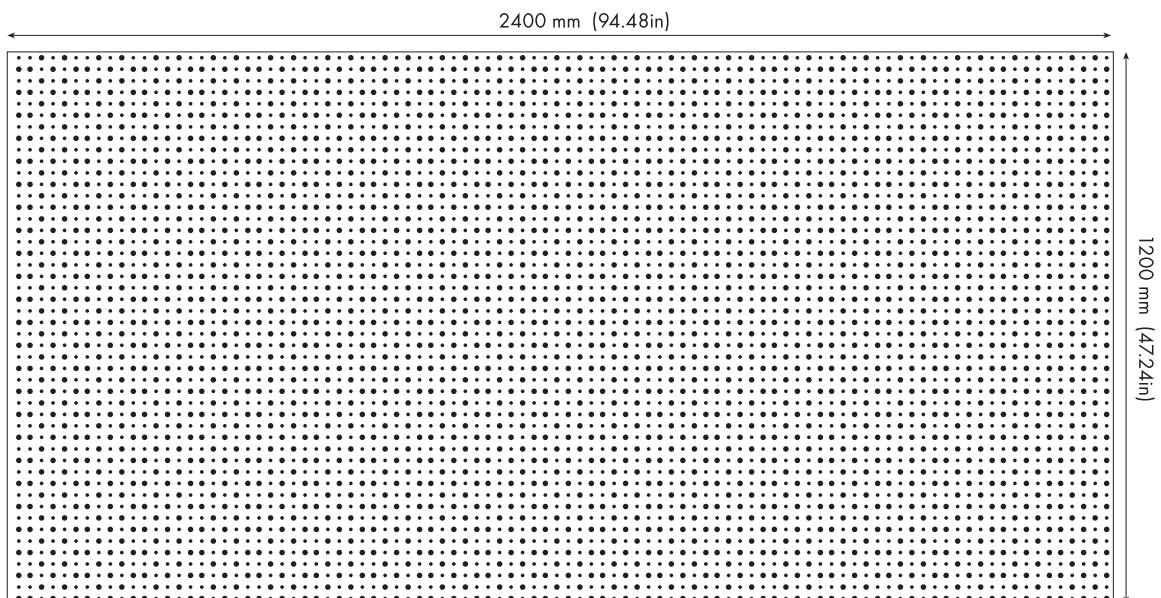


SONUS COMPOSITE 8/12/50

All Sonos patterns are interchangeable and can be rotated

1200mm x 2700mm (~47.24" x 106.49")

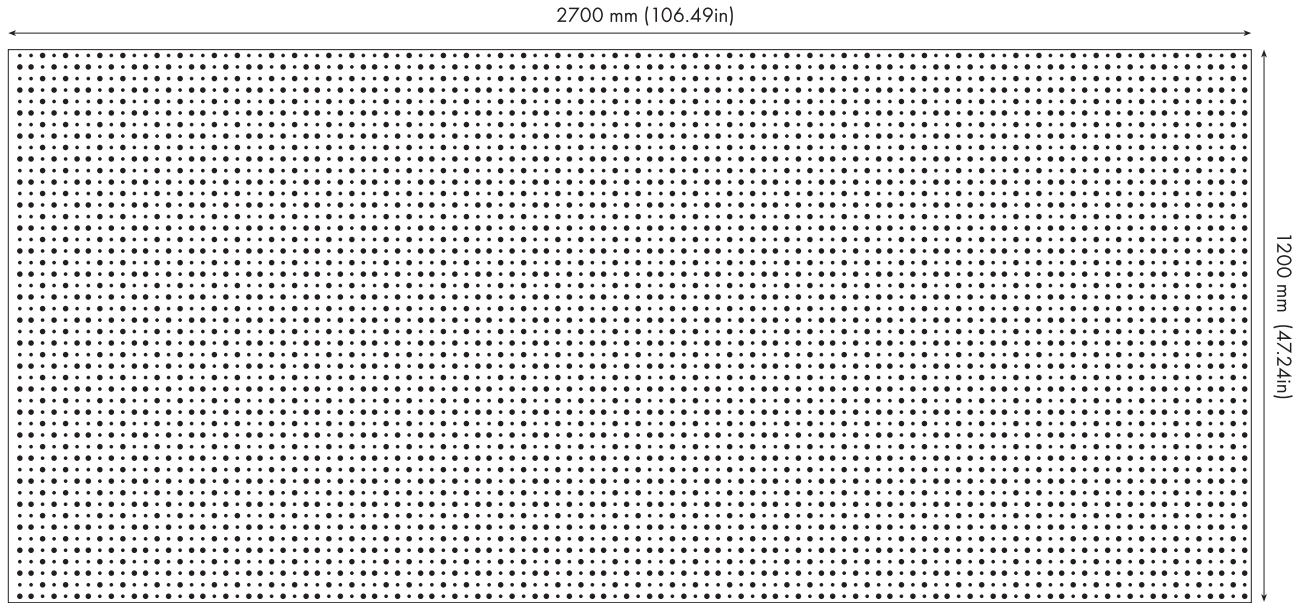

900mm x 2700mm* (~35.43" x 106.49")

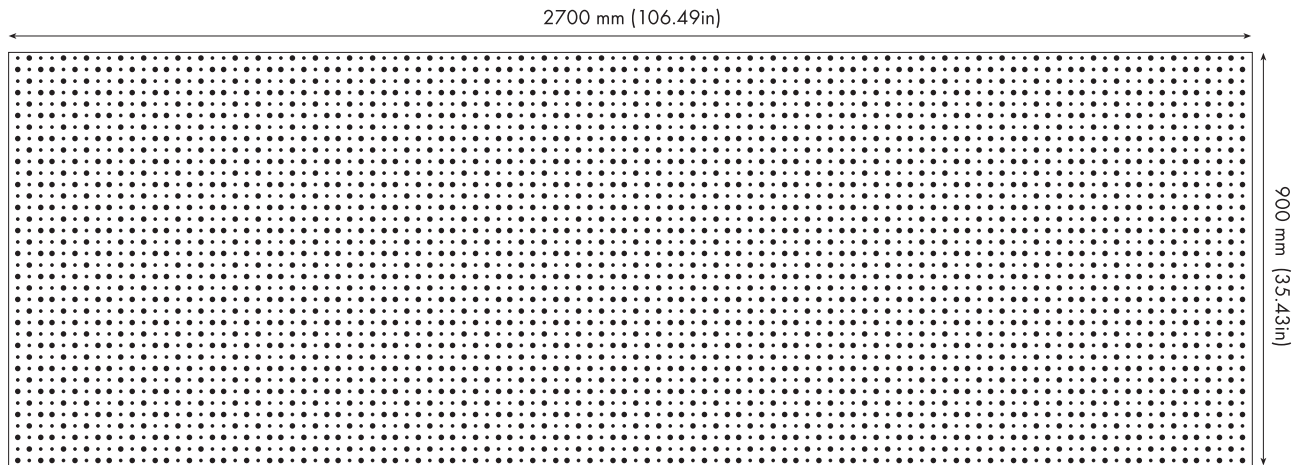


*Limited to stock on hand

SONUS COMPOSITE 12/20/66

Sonus panels are high density gypsum board with continuous sound absorbing perforations for a monolithic appearance. They can be used on ceilings, walls and special applications where noise reduction is critical. Sonus panels come in many perforation designs, some with random patterns, some with sequential patterns. The perforated board absorbs and diffuses sound that would otherwise reflect back into the room.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

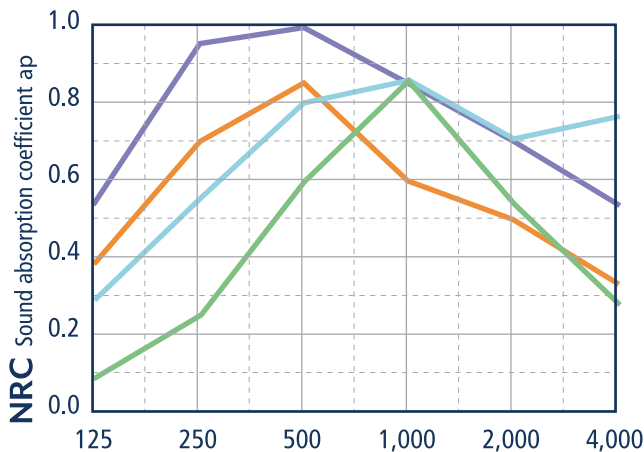

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.10	0.25	0.60	0.85	0.55	0.30
Cavity Depth 8" Felt Only	0.40	0.70	0.85	0.60	0.50	0.35
Cavity Depth 2" with 2" fiberglass	0.30	0.55	0.80	0.85	0.60	0.65
Cavity Depth 8" with 2" fiberglass	0.55	0.95	1.00	0.85	0.70	0.55

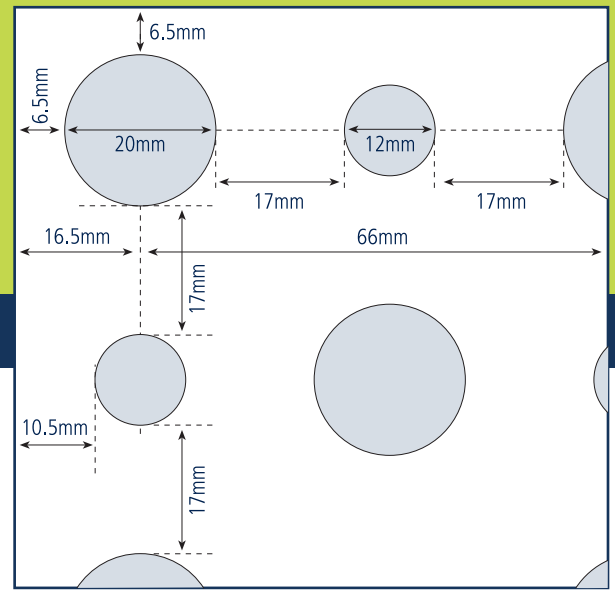

100% size to show pattern

CHARACTERISTICS

Perforation Type:	12mm/20mm/66mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	19.6%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 900 mm x 2700 mm (~35.43" x 106.3")* ☐
- 1188 mm x 1980 mm (~46.77" x 77.95")* ☐
- 1188 mm x 2376 mm (~46.77" x 93.54")* ☐
- 1188 mm x 2706 mm (~46.77" x 106.54")* ☐

*Limited to stock on hand

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sonus/Strata Installation Principles for further information.

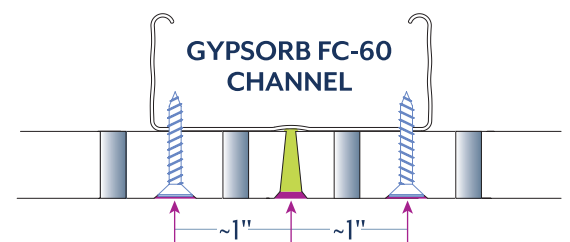


SONUS COMPOSITE 12/20/66

All Sonos patterns are interchangeable and can be rotated

900mm x 2700mm (~36.37" x 106.53")

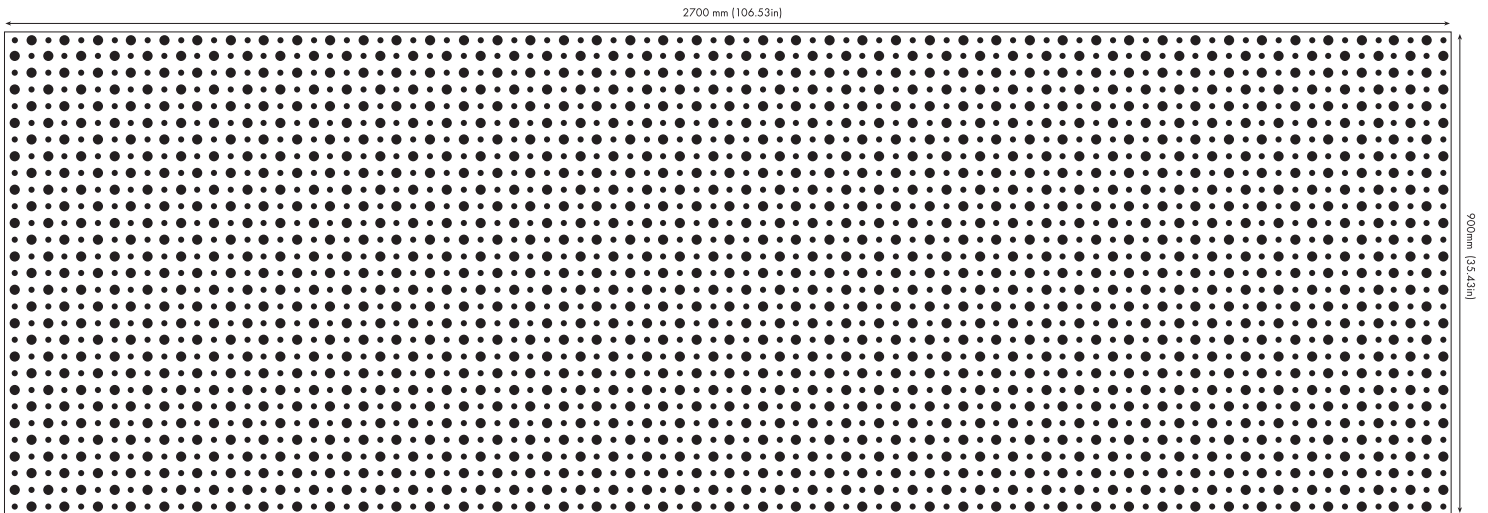


1188mm x 1980mm (~46.77" x 77.95")

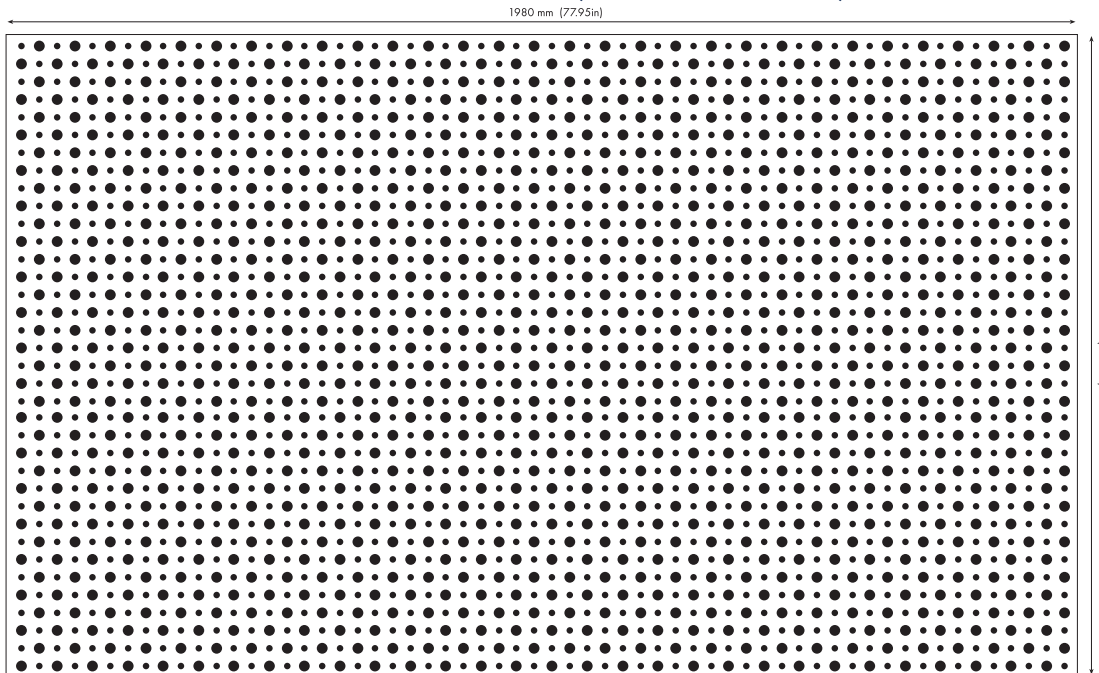


SONUS COMPOSITE 12/20/66

All Sonos patterns are interchangeable and can be rotated

1188mm x 2376mm (~46.77" x 93.54")

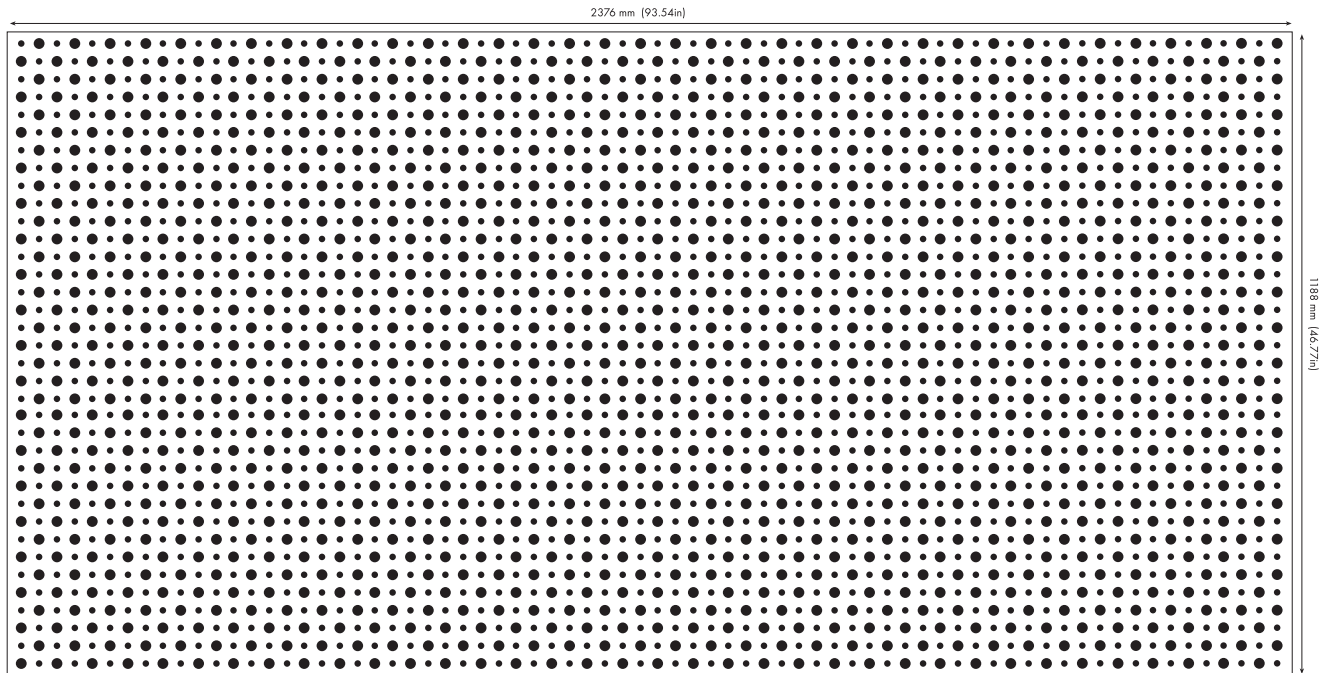

1188mm x 2706mm (~46.77" x 106.54")

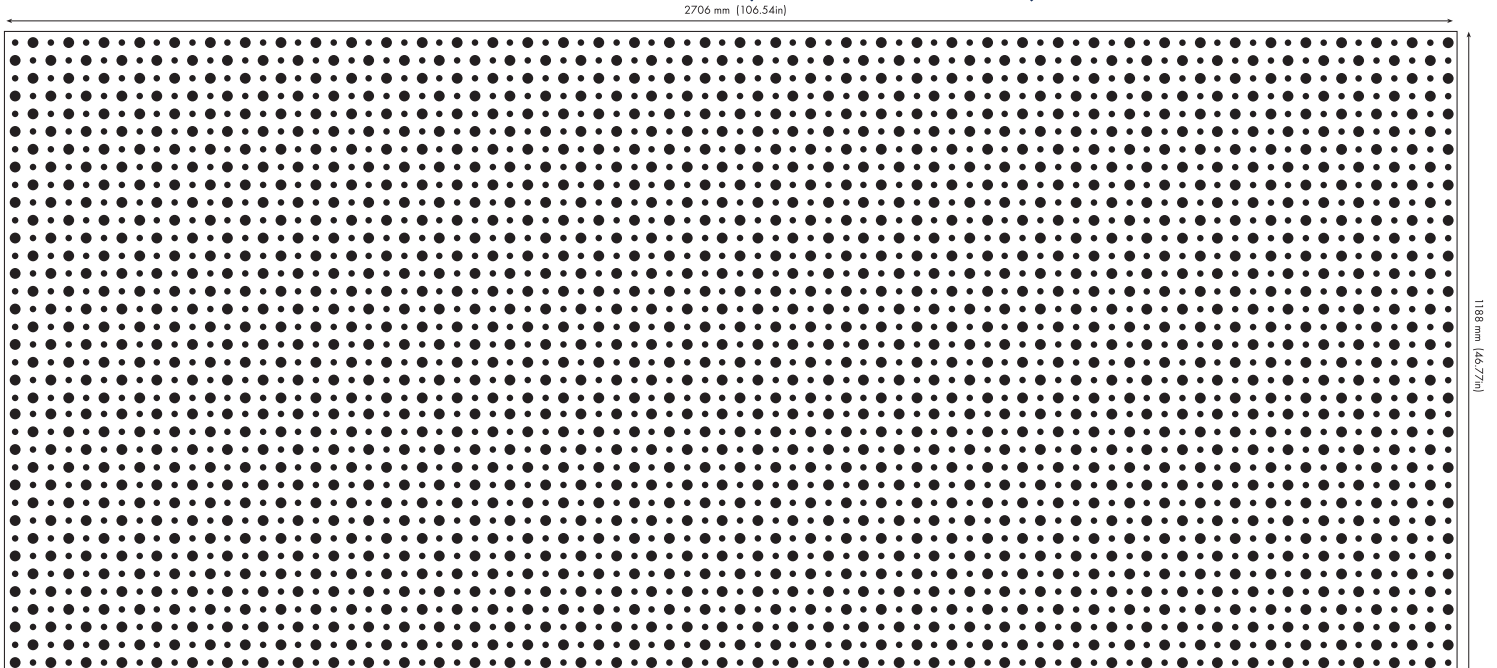


STRATA 8/15/20

Strata panels are high density gypsum board with continuous sound absorbing perforations. They can be used on ceilings, walls and special applications where noise reduction is critical and architectural design is unique.

The random round perforations create a dramatic visual element that is easier to use on curves and bends where a straight line pattern may not look as nice.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

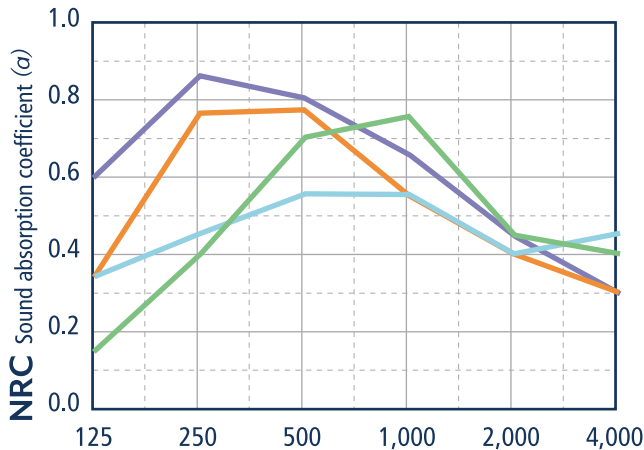

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.40	0.70	0.75	0.45	0.40
Cavity Depth 8" Felt Only	0.35	0.75	0.75	0.55	0.40	0.30
Cavity Depth 2" with 2" fiberglass	0.35	0.45	0.55	0.55	0.40	0.45
Cavity Depth 8" with 2" fiberglass	0.60	0.85	0.80	0.65	0.45	0.30

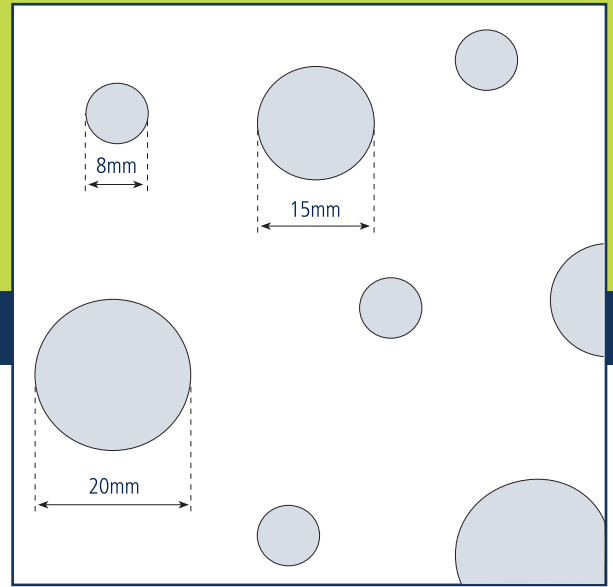

100% size to show pattern

CHARACTERISTICS


Perforation Type:	8mm/15mm/20mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	9.9%
Weight:	1.76 lbs / s.f.

AVAILABLE BOARD SIZES

- 1200mm x 2000mm (~47.24" x 78.74") ☐
- 1200mm x 2500mm (~47.24" x 98.42") ☐

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Stratum Installation Principles for further information.

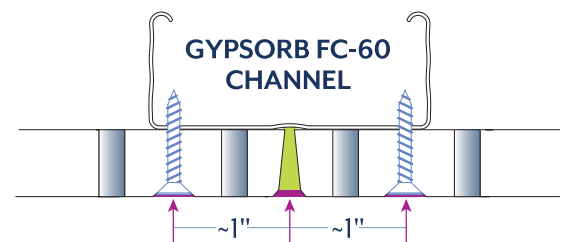

STRATA 8/15/20


1200mm x 2000mm (~47.24" x 78.74")

1200 mm (47.24in)

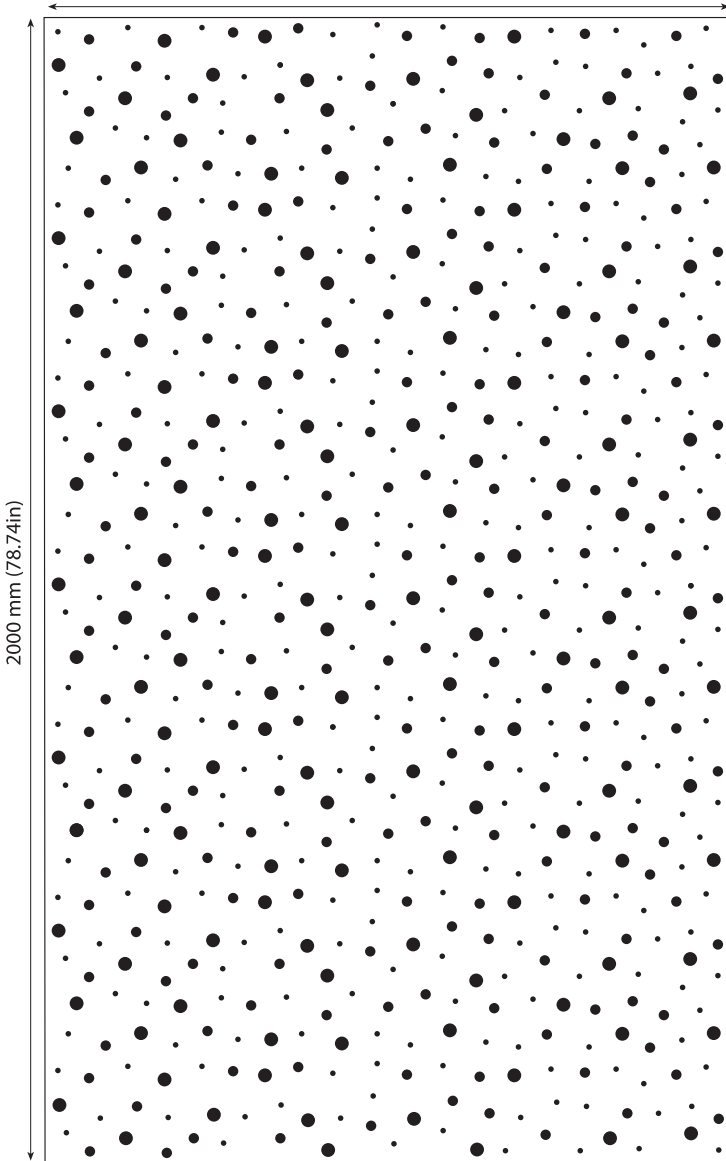

1200mm x 2500mm (~47.24" x 98.42")

1200 mm (47.24in)

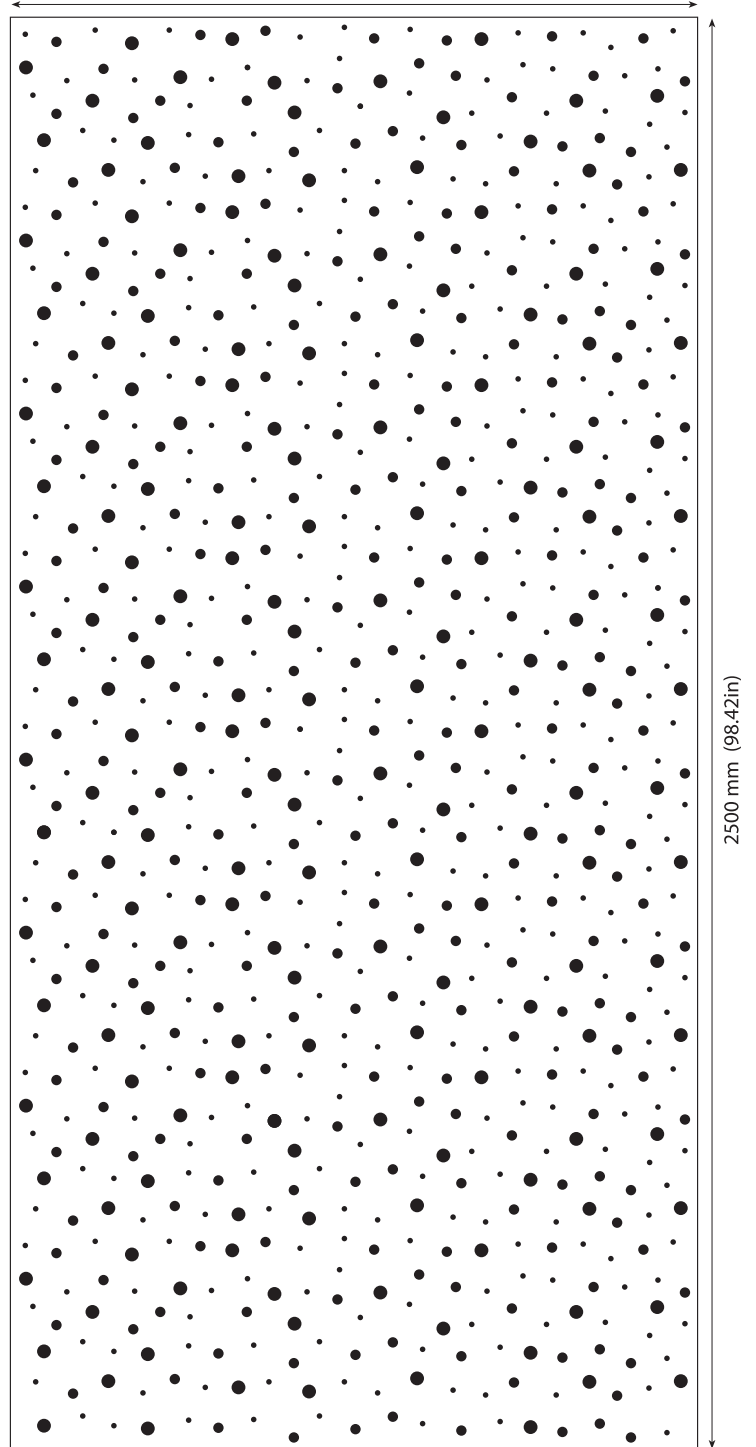


STRATA 12/20/35

Strata panels are high density gypsum board with continuous sound absorbing perforations. They can be used on ceilings, walls and special applications where noise reduction is critical and architectural design is unique.

The random round perforations create a dramatic visual element that is easier to use on curves and bends where a straight line pattern may not look as nice.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

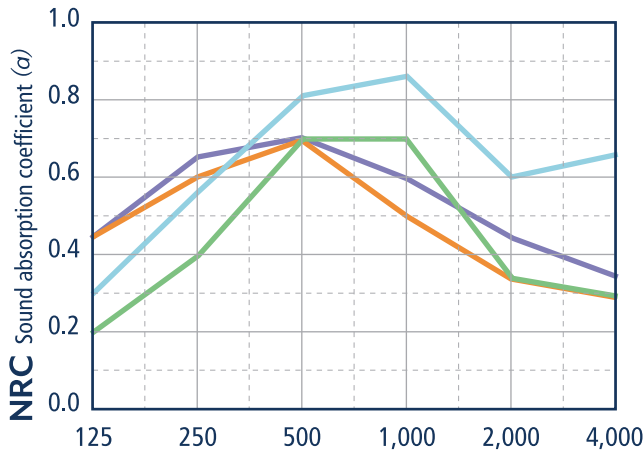

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.20	0.40	0.70	0.35	0.35	0.30
Cavity Depth 8" Felt Only	0.45	0.60	0.70	0.50	0.35	0.30
Cavity Depth 2" with 2" fiberglass	0.30	0.55	0.80	0.85	0.60	0.65
Cavity Depth 8" with 2" fiberglass	0.45	0.65	0.70	0.60	0.45	0.35

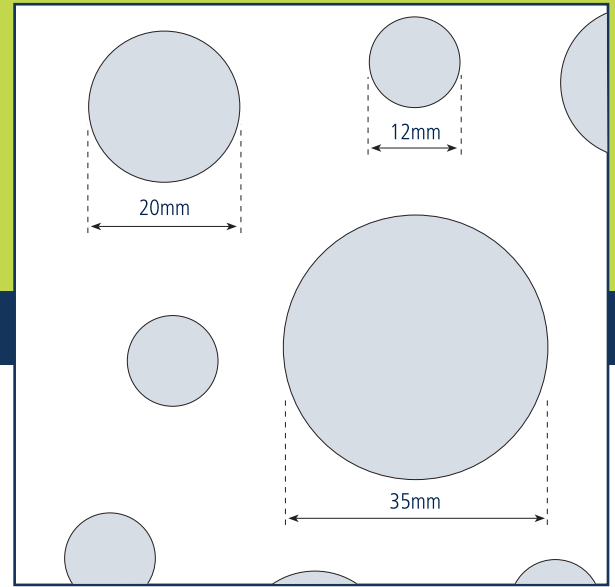

100% size to show pattern

CHARACTERISTICS

Perforation Type:	12mm/20mm/35mm
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Charcoal Gray
Finish:	Unfinished paper face
Open Area:	9.8%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 1200mm x 1875mm (~47.24" x 73.82")* ☐
- 1200mm x 2000mm (~47.24" x 78.74")* ☐
- 1200mm x 2500mm (~47.24" x 98.43")* ☐

*Limited to stock on hand


JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Sratum Installation Principles for further information.

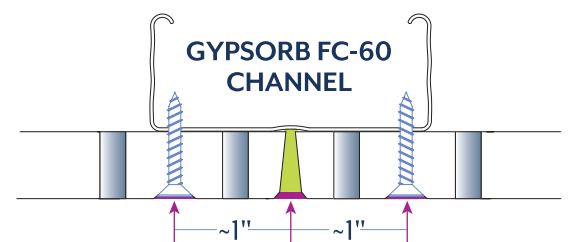


STRATA 12/20/35

1200mm x 1875mm (~47.24" x 73.82")

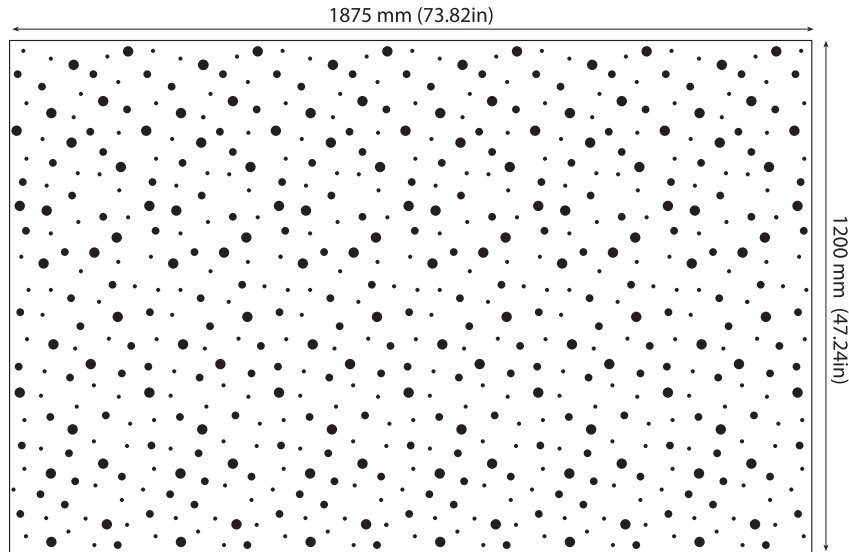


1200mm x 2000mm (~47.24" x 78.74")

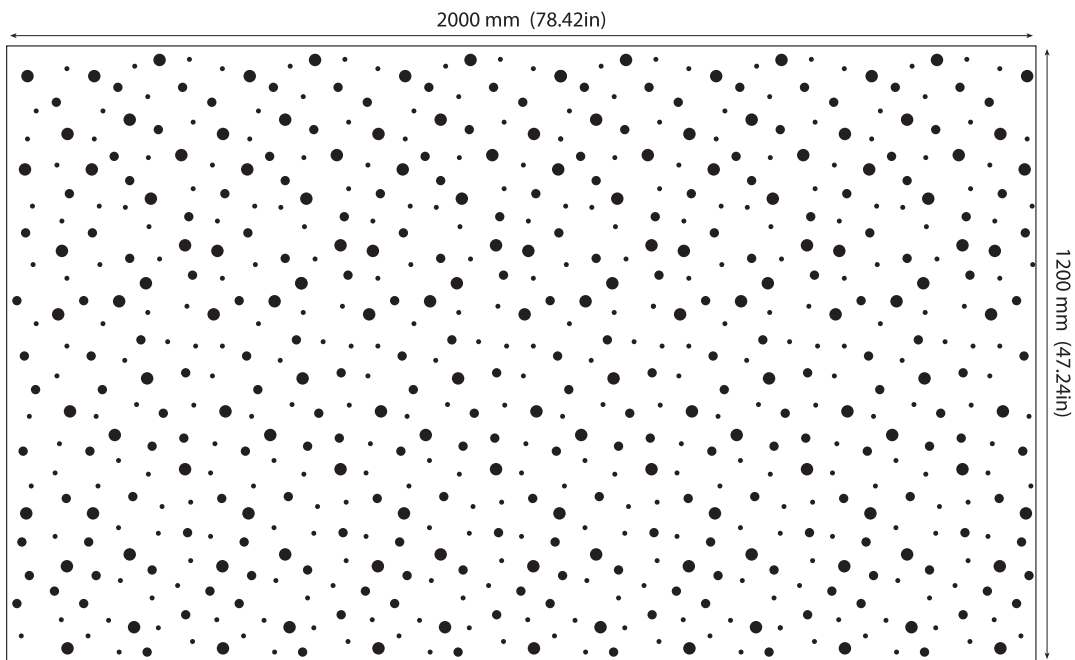

STRATA 12/20/35

1200mm x 2500mm (~47.24" x 98.43")

2500 mm (98.42in)

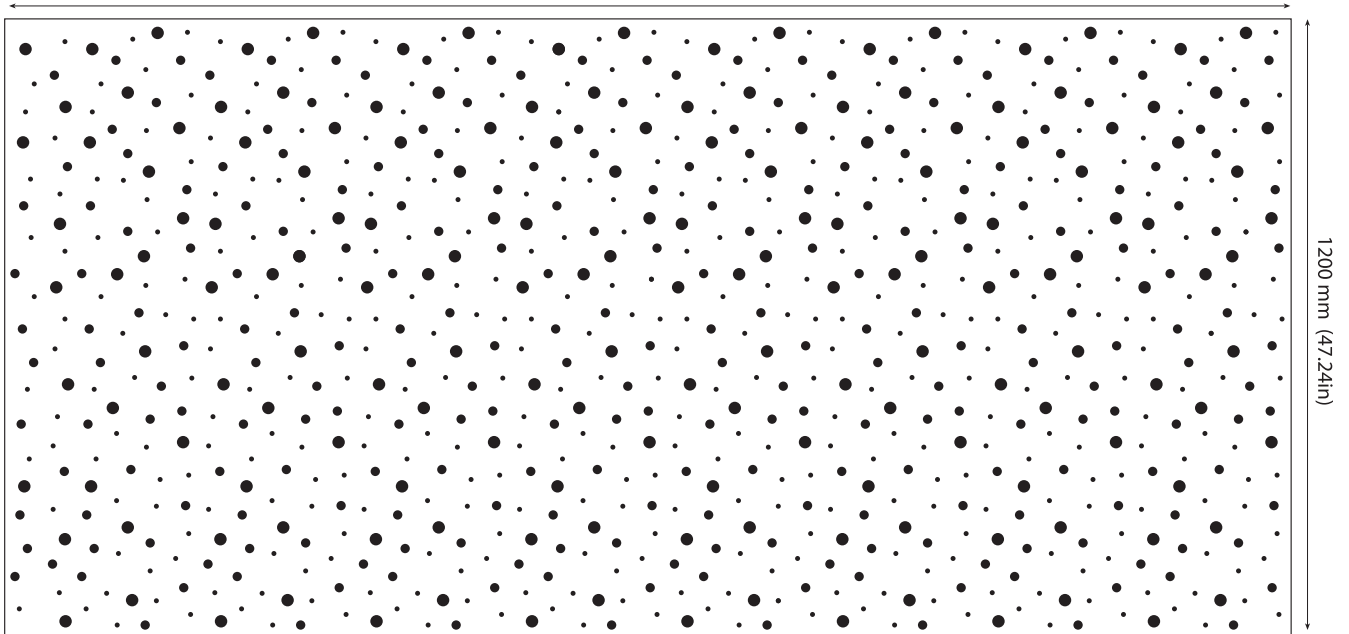


STRATUM MICRO

Stratum Square panels are high density gypsum boards in 4 types of patterns. The panel width and border perimeters varies depending on the installation type and desired pattern effect.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

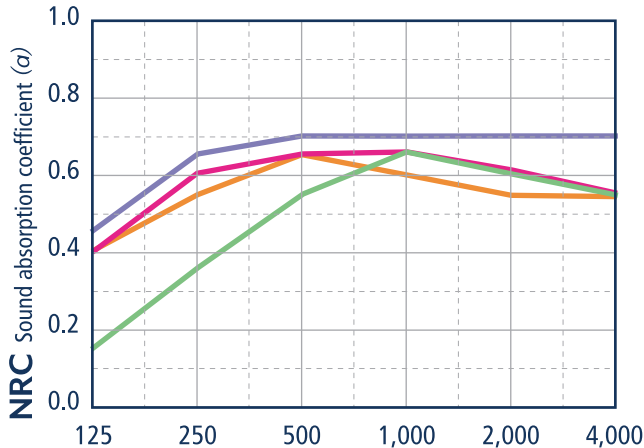

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.15	0.35	0.55	0.65	0.60	0.55
Cavity Depth 8" Felt Only	0.40	0.55	0.65	0.60	0.55	0.55
Cavity Depth 2" with 2" fiberglass	0.40	0.60	0.65	0.65	0.60	0.55
Cavity Depth 8" with 2" fiberglass	0.45	0.65	0.70	0.70	0.70	0.70

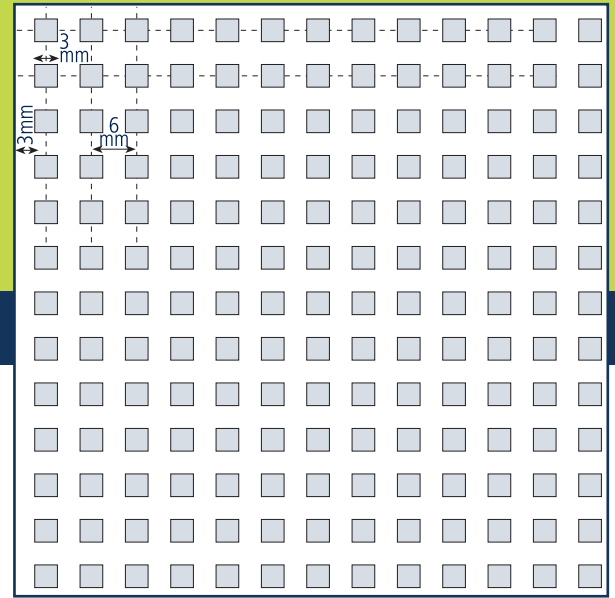

100% size to show pattern

CHARACTERISTICS


Perforation Type:	Micro
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Off White Grey
Finish:	Unfinished paper face
Open Area:	7.1% - 9.8%
Weight:	1.76 lbs / s.f.

AVAILABLE BOARD SIZES

- 900mm x 2700mm (~35.43" x 106.3") ☐
- 1200mm x 2400mm (~47.24" x 94.49") ☐

JOINT TREATMENT


Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Stratum Installation Principles for further information.

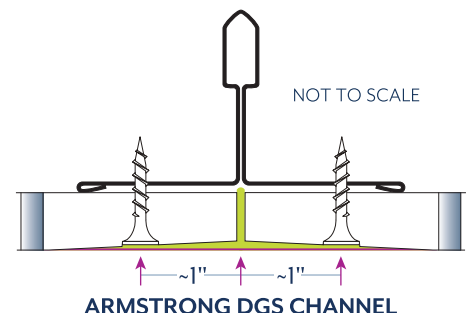

SONUS MICRO


M 2/4 1200mm x 2400mm (~47.24" x 94.49")

2400 mm (94.49in)

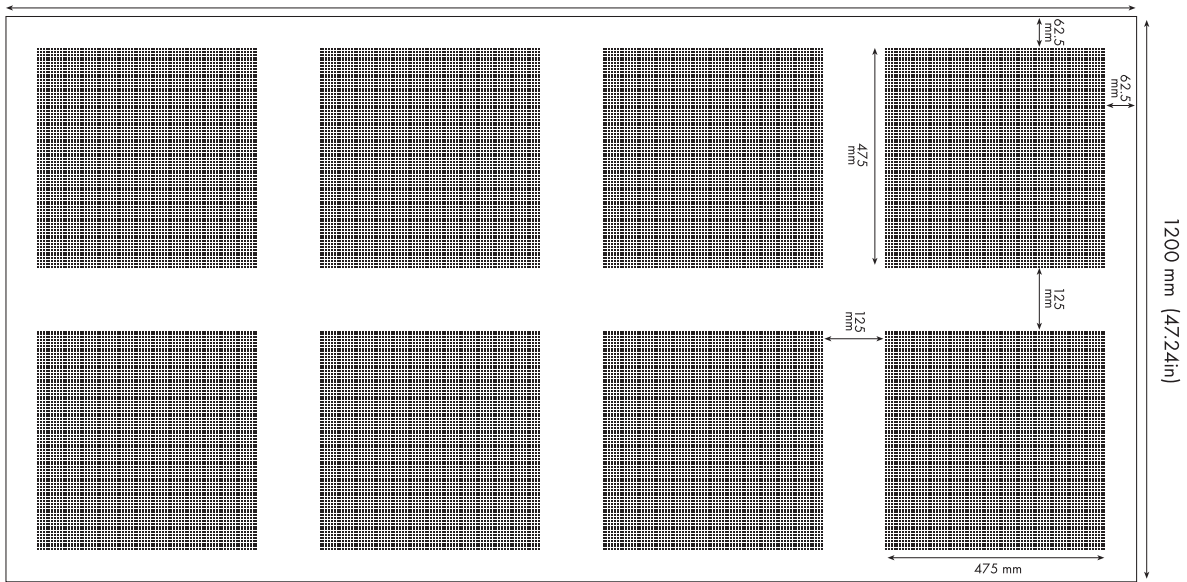

M 2/6 900mm x 2700mm (~35.43" x 106.3")


2700 mm (106.30in)

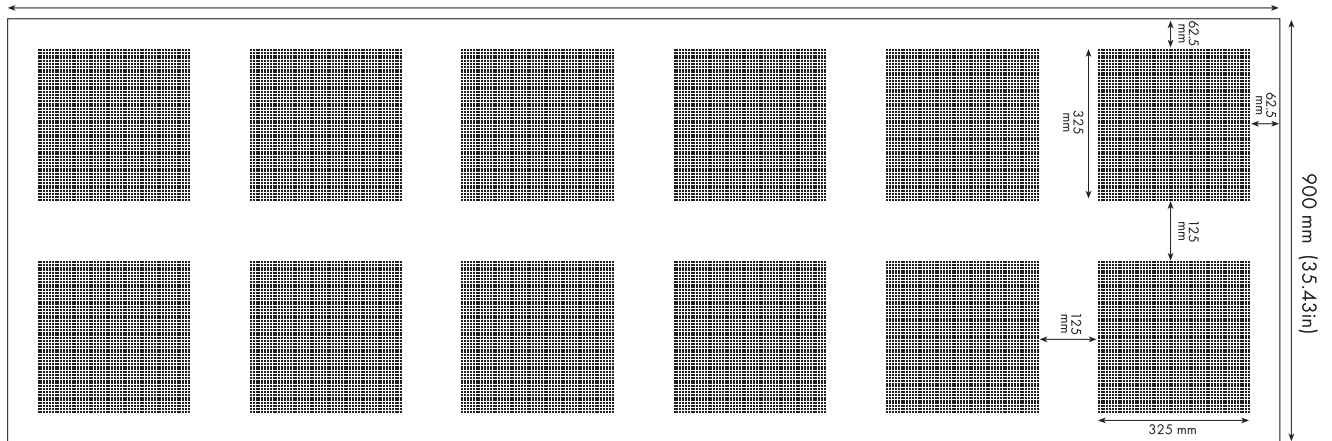

SONUS MICRO

M 1/3 900mm x 2700mm (~35.43" x 106.3")

2700 mm (106.30in)

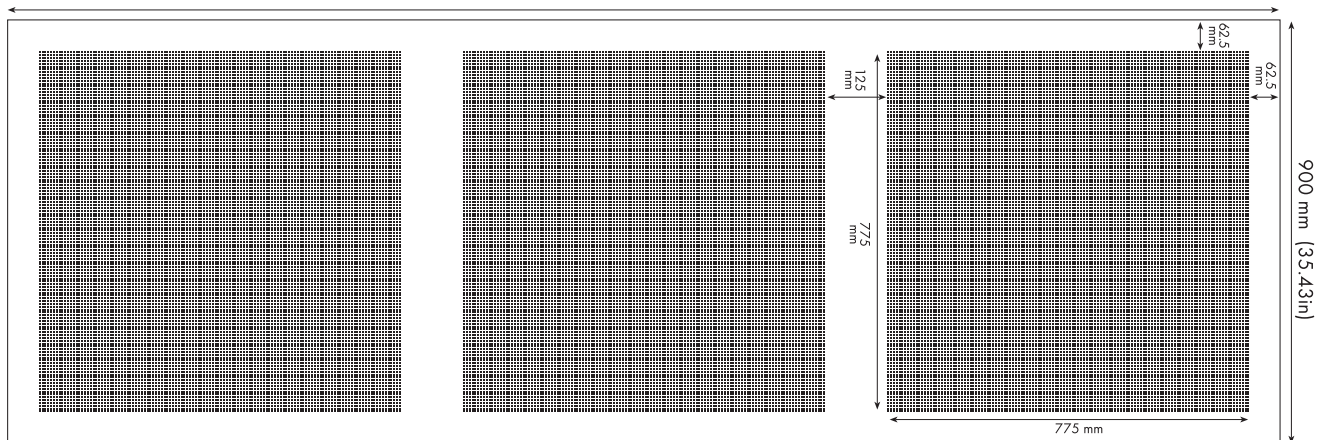


STRATUM ROUND

Stratum Square panels are high density gypsum boards in 4 types of patterns. The panel width and border perimeters varies depending on the installation type and desired pattern effect.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

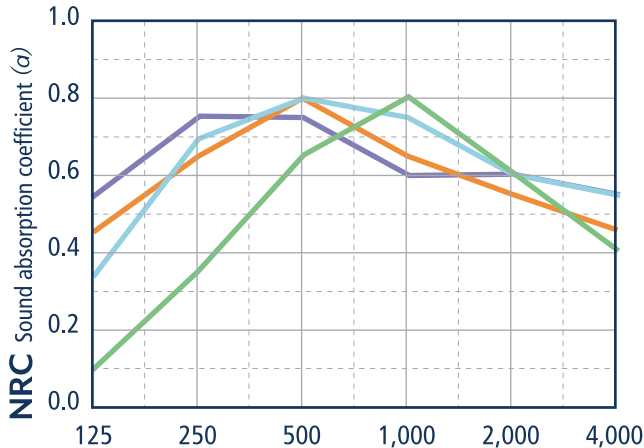

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.10	0.35	0.65	0.80	0.60	0.40
Cavity Depth 8" Felt Only	0.45	0.65	0.80	0.65	0.55	0.45
Cavity Depth 2" with 2" fiberglass	0.35	0.70	0.80	0.75	0.60	0.50
Cavity Depth 8" with 2" fiberglass	0.55	0.75	0.75	0.60	0.60	0.55

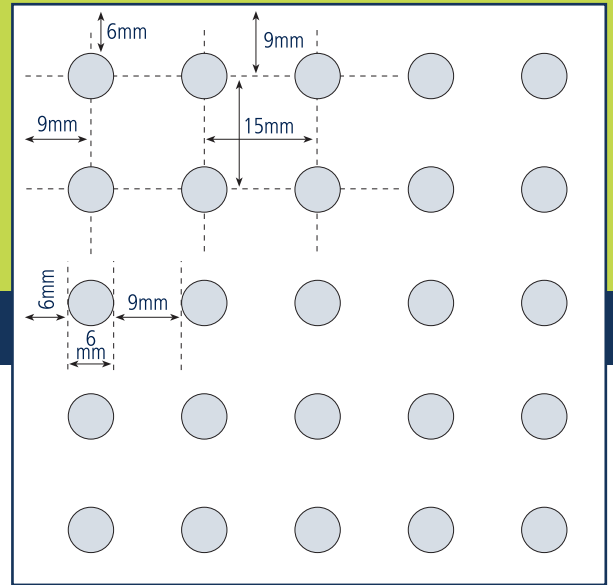

100% size to show pattern

CHARACTERISTICS

Perforation Type:	Round
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Off White Grey
Finish:	Unfinished paper face
Open Area:	7.1% - 9.8%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 900mm x 2700mm (~35.43" x 106.3") ☐
- 1200mm x 2400mm (~47.24" x 94.49")* ☐

*Limited to stock on hand


JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Stratum Installation Principles for further information.

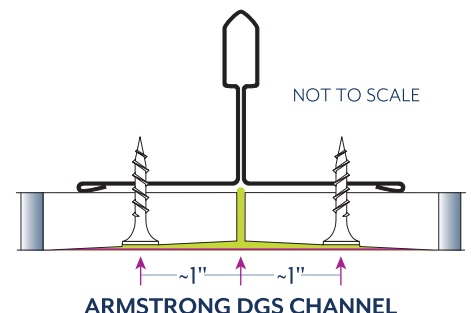


STRATUM ROUND

R 1/3
900mm
x 2700mm
(~35.43"
x 106.30")

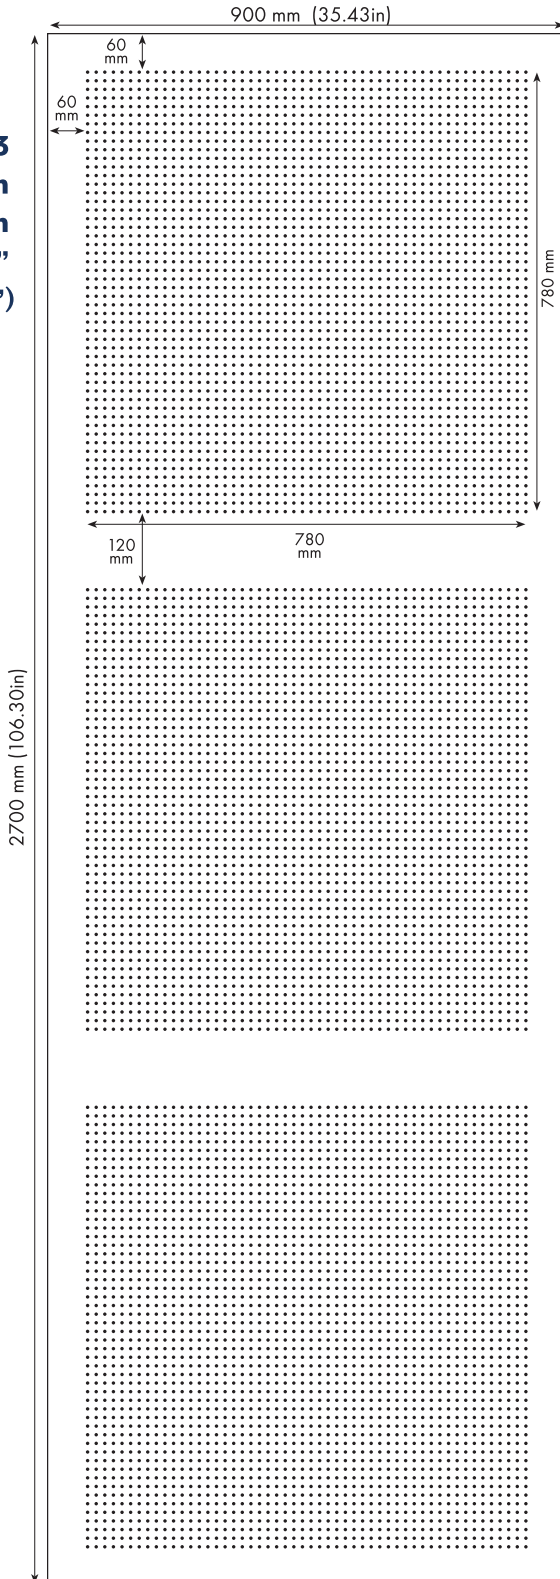


R 2/6
900mm
x 2700mm
(~35.43"
x 106.30")

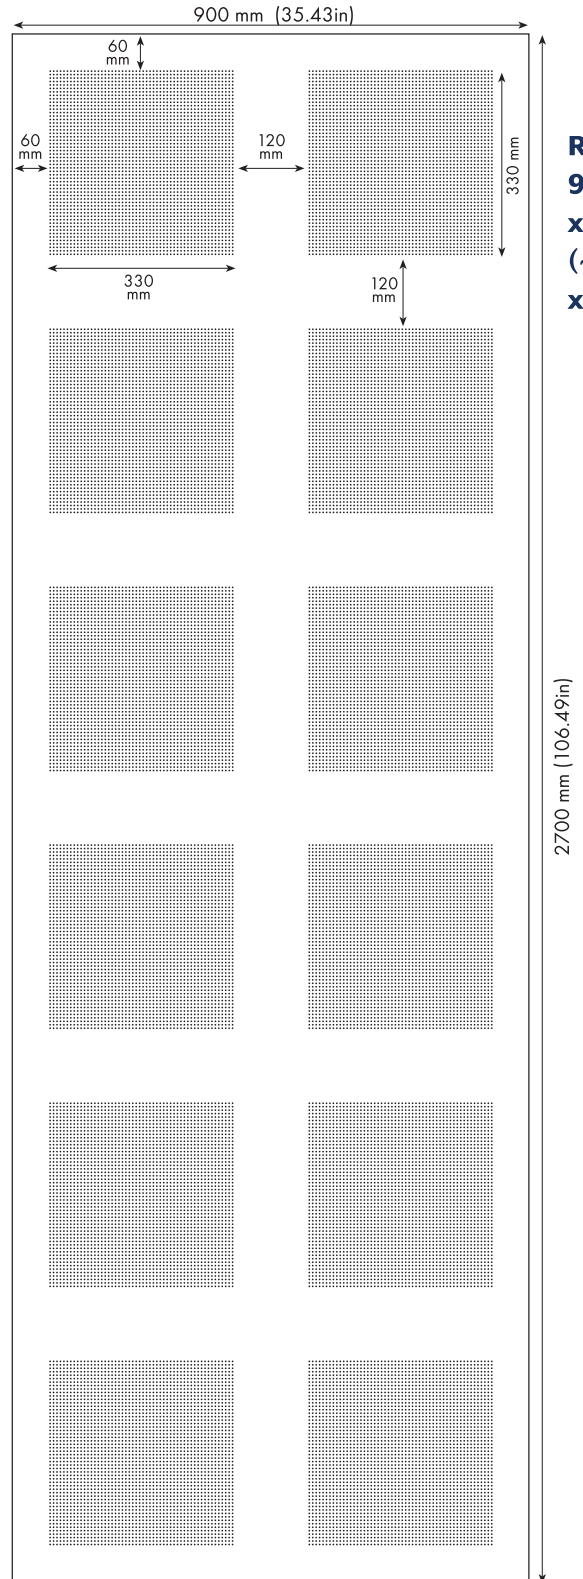


STRATUM ROUND

R 2/4 1200mm x 2400mm (~47.24" x 94.49")

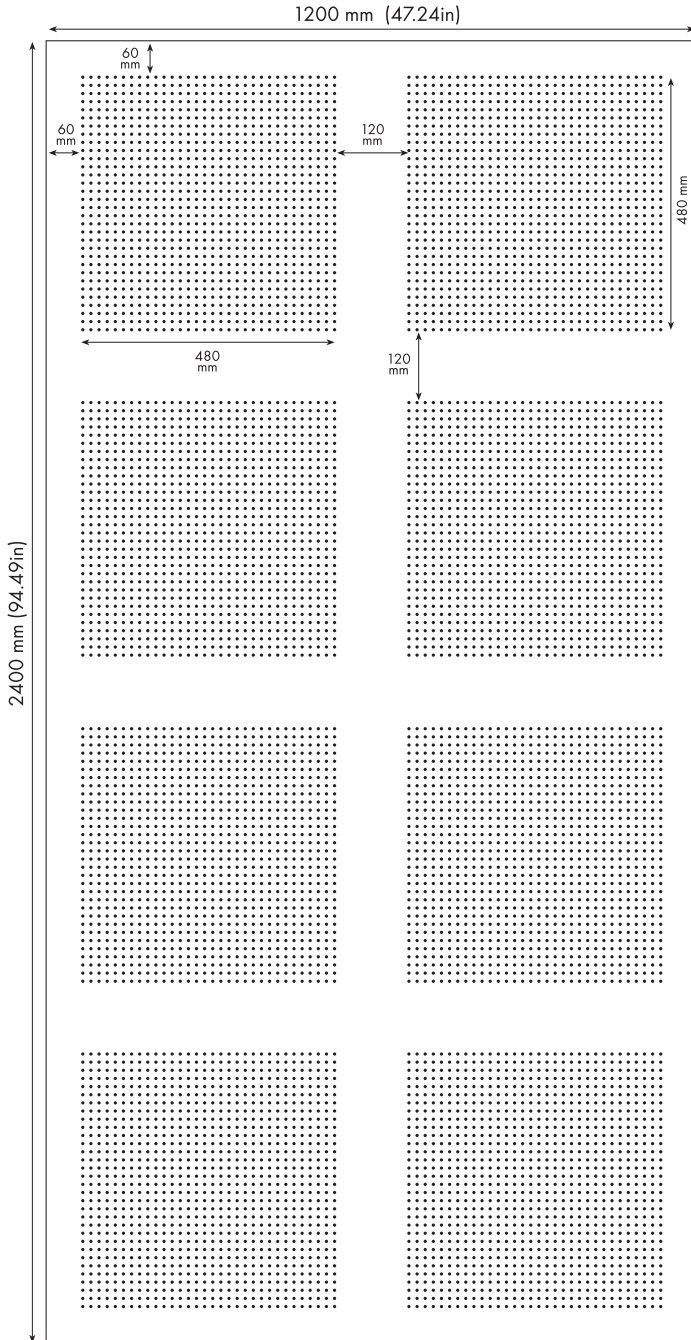

R 4/8 1200mm x 2400mm (~47.24" x 94.49")

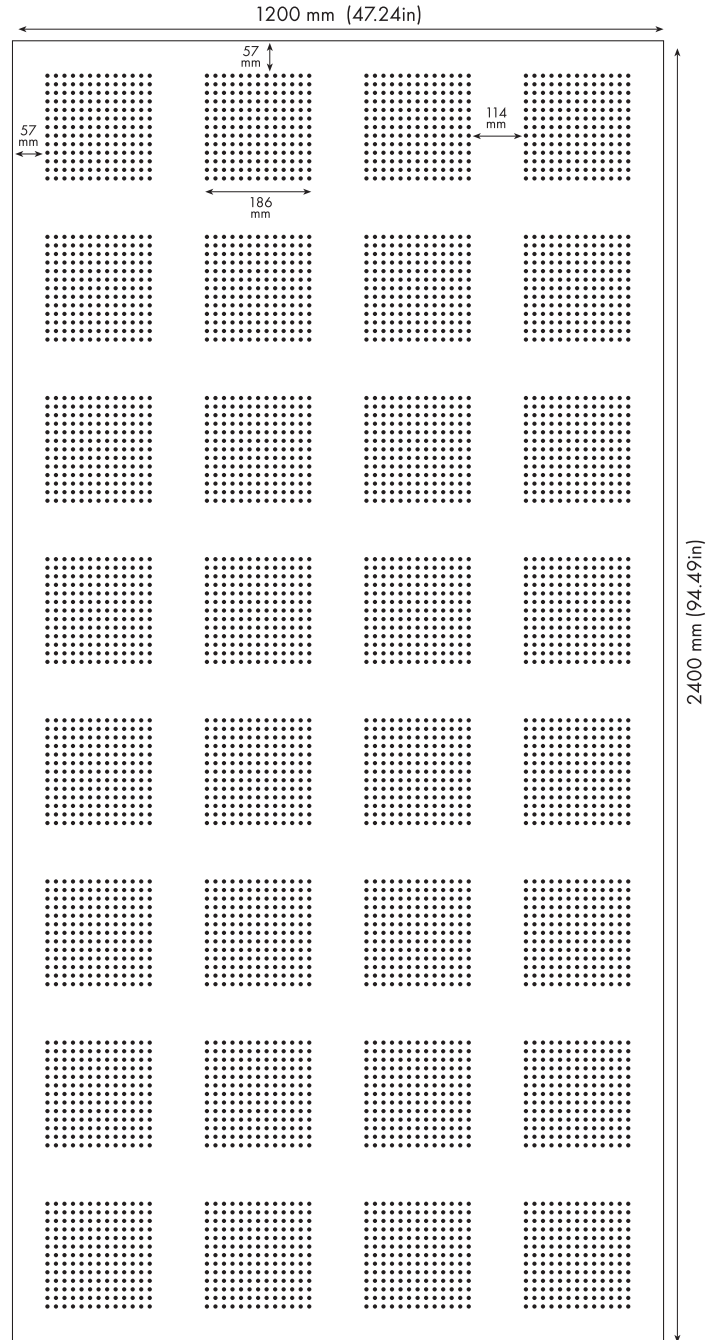


STRATUM SLOTTED

Stratum Square panels are high density gypsum boards in 4 types of patterns. The panel width and border perimeters varies depending on the installation type and desired pattern effect.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)** according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

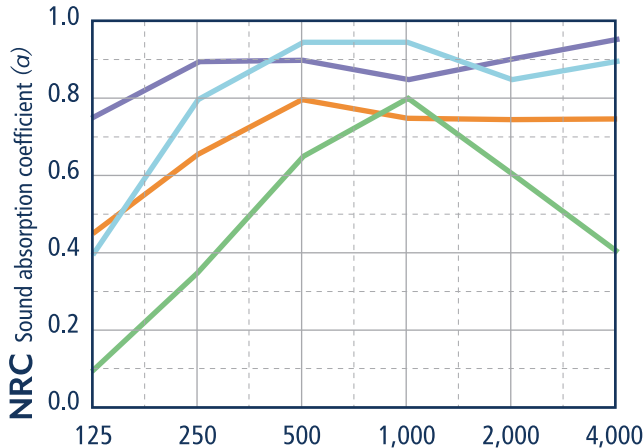

FREQUENCY (Hz)

Cavity Depth 2" Felt Only	0.10	0.35	0.65	0.80	0.60	0.40
Cavity Depth 8" Felt Only	0.45	0.65	0.80	0.75	0.75	0.75
Cavity Depth 2" with 2" fiberglass	0.40	0.80	0.95	0.95	0.85	0.90
Cavity Depth 8" with 2" fiberglass	0.75	0.90	0.90	0.85	0.90	0.95

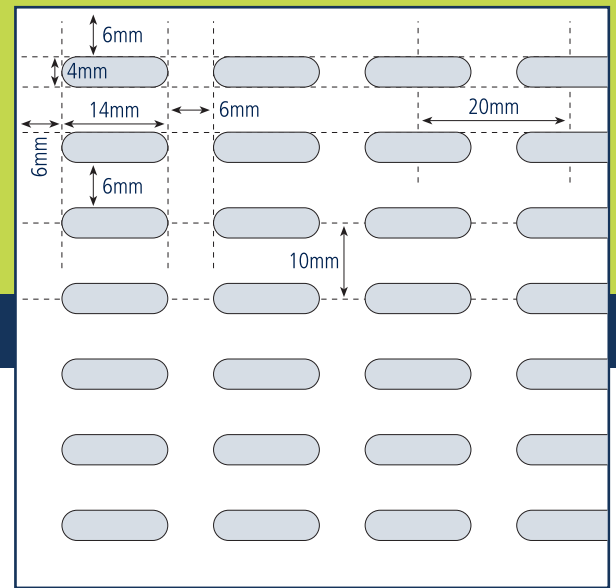

100% size to show pattern

CHARACTERISTICS

Perforation Type:	Slotted
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Off White Grey
Finish:	Unfinished paper face
Open Area:	13.3% - 15.8%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 900mm x 2400mm (~35.43" x 94.49") ☐
- *900mm x 2700mm (~35.43" x 106.3") ☐
- *1200mm x 2400mm (~47.24" x 94.49")* ☐

*Limited to stock on hand


JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Stratum Installation Principles for further information.

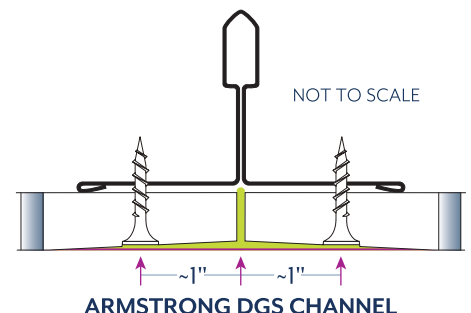


STRATUM SLOTTED


S 3/1 900mm x 2400mm (~35.43" x 94.49")

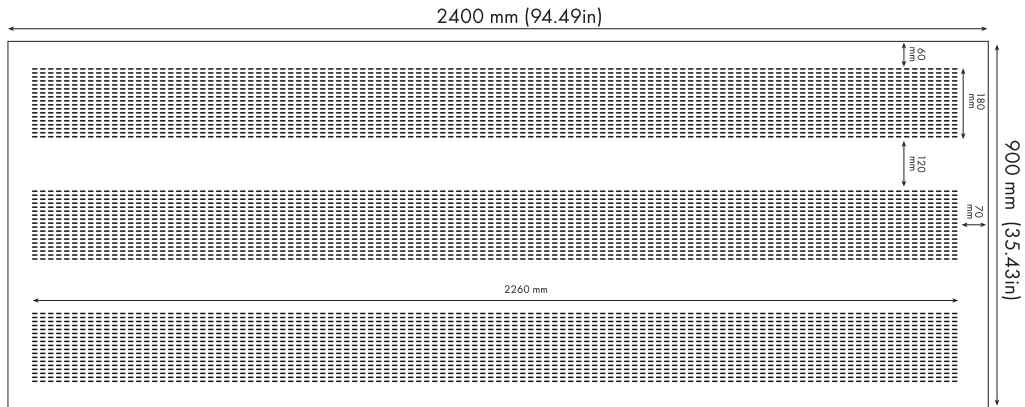

S 3/2 900mm x 2400mm (~35.43" x 94.49")

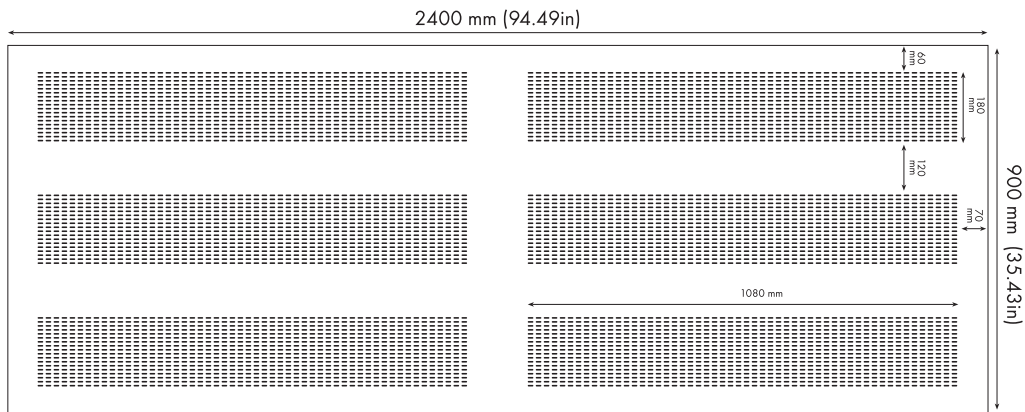


S 3/4 900mm x 2400mm (~35.43" x 94.49")

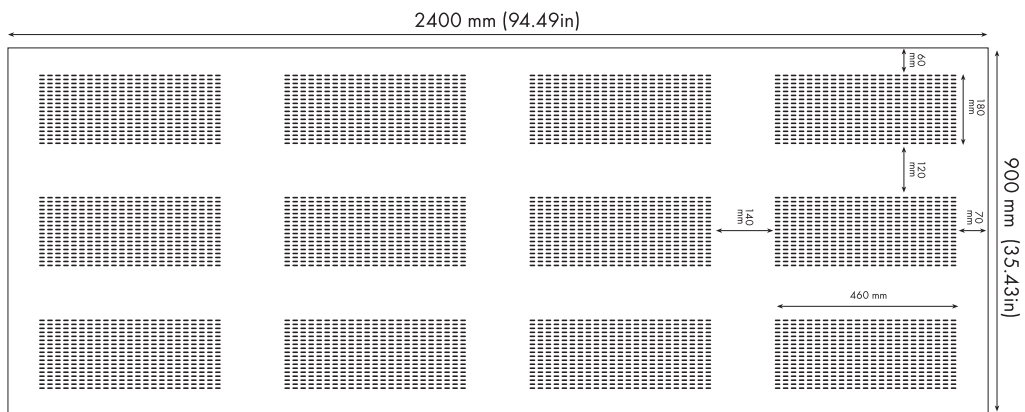


STRATUM SLOTTED

S 3/3 900mm x 2700mm (~35.43" x 106.29")

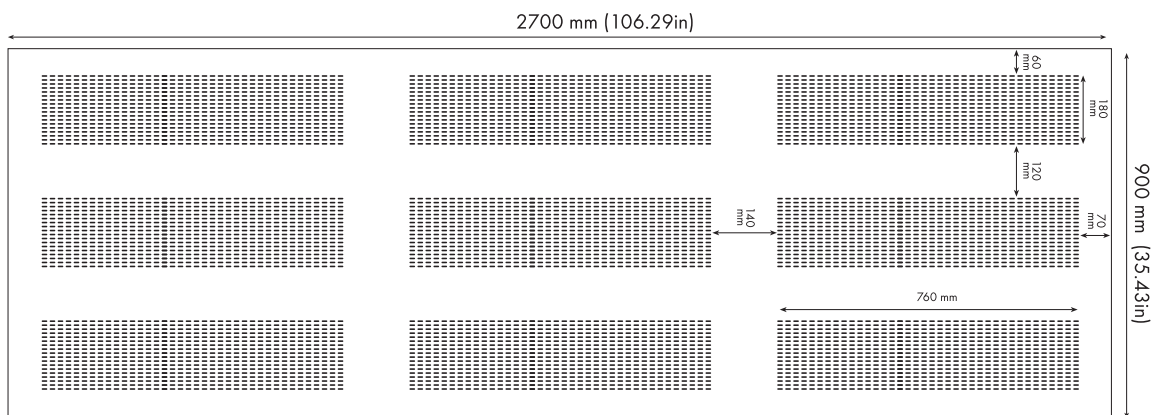

*Limited to stock on hand


S 3/1 900mm x 2700mm (~35.43" x 106.29")

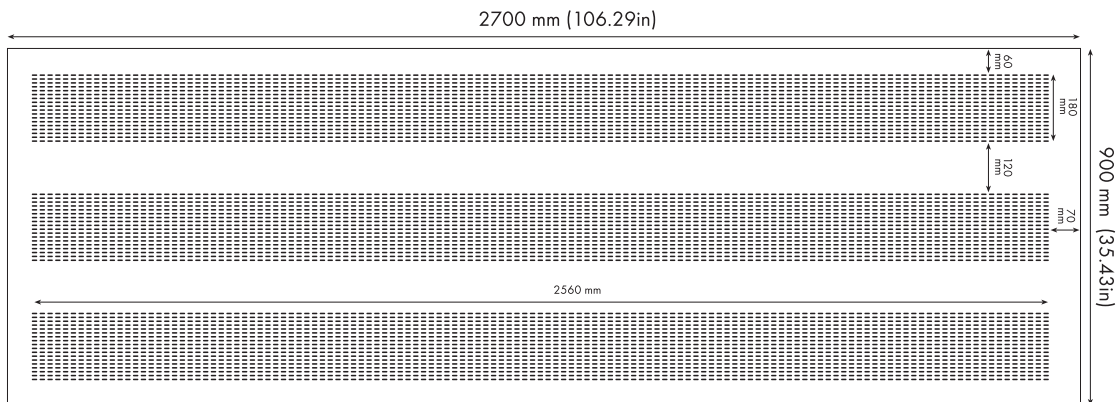

*Limited to stock on hand


STRATUM SLOTTED

S 4/2 1200mm x 2400mm (~47.24" x 94.48")

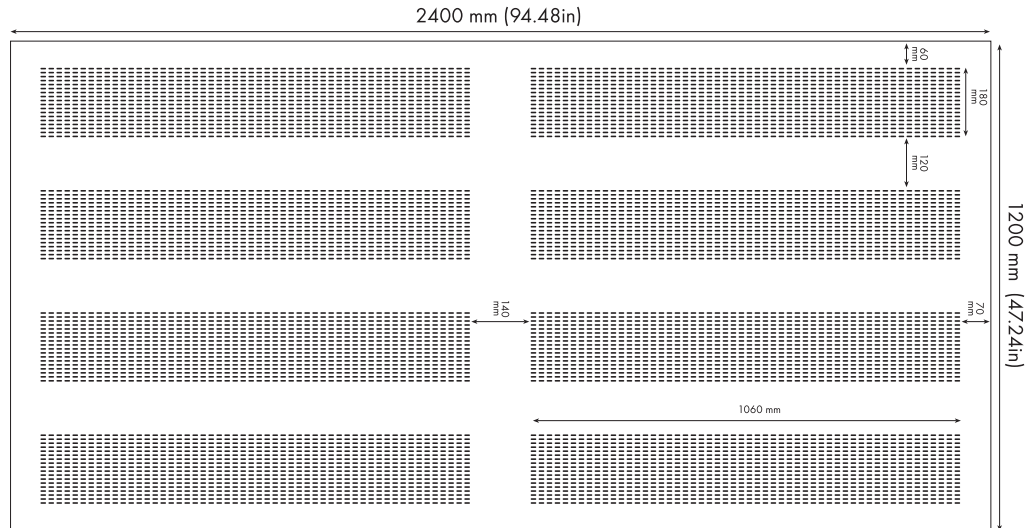

*Limited to stock on hand

S 4/4 1200mm x 2400mm (~47.24" x 94.48")

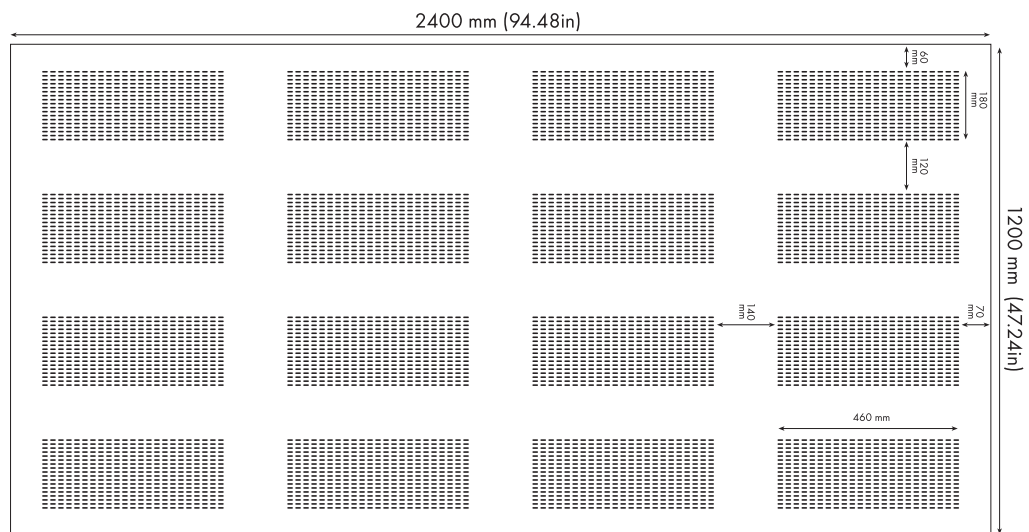


*Limited to stock on hand

STRATUM SQUARE

Stratum Square panels are high density gypsum boards in 4 types of patterns. The panel width and border perimeters varies depending on the installation type and desired pattern effect.


PERFORMANCE

-  **A 2-21, D0 (non-flammable)**
according to DIN EN 13501
-  **Maximum Relative Humidity: 70%**
-  **Recycled Content: 86% (3% Post Consumer)**
-  **NRC: Up to .85**

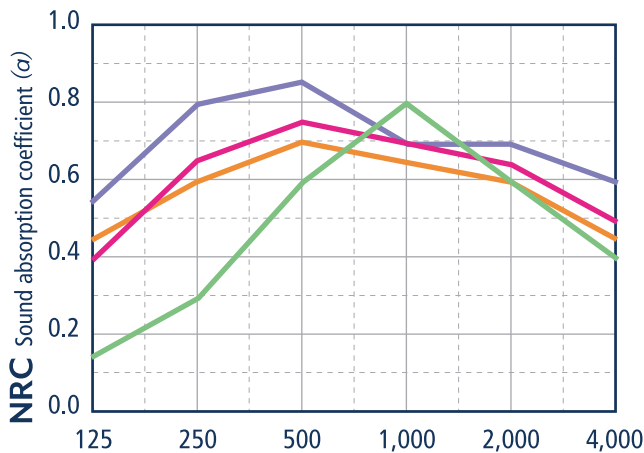

FREQUENCY (Hz)

Cavity Depth 2.5" Felt Only	0.15	0.30	0.60	0.80	0.50	0.40
Cavity Depth 8" Felt Only	0.45	0.60	0.70	0.65	0.60	0.45
Cavity Depth 2.5" with 2" fiberglass	0.40	0.65	0.75	0.70	0.65	0.50
Cavity Depth 8" with 2" fiberglass	0.55	0.80	0.85	0.70	0.70	0.60

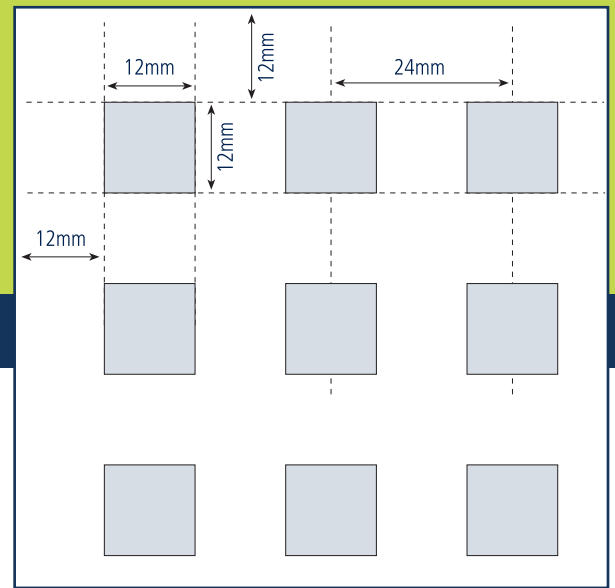

100% size to show pattern

CHARACTERISTICS

Perforation Type:	Square
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Off White Grey
Finish:	Unfinished paper face
Open Area:	7.8% - 13.0%
Weight:	1.76 lbs / s.f.


AVAILABLE BOARD SIZES

- 900mm x 2700mm (~35.43" x 106.3") ☐
- 1200mm x 2400mm (~47.24" x 94.49")* ☐

*Limited to stock on hand


JOINT TREATMENT

Joints are filled with **GypSorb Ready Mix** joint compound then skimmed over with **standard finishing compound**. Once dry, the joints are sanded smooth in order to receive prime and paint. See Stratum Installation Principles for further information.

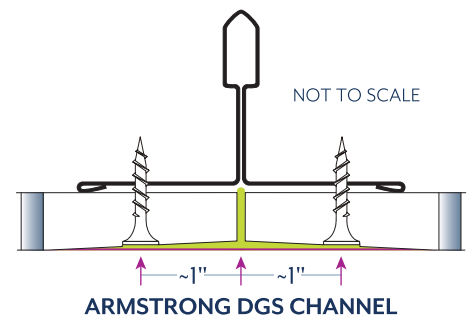


STRATUM SQUARE

Q 2/6
2700mm
x 900mm
(~106.30"
x 35.43")

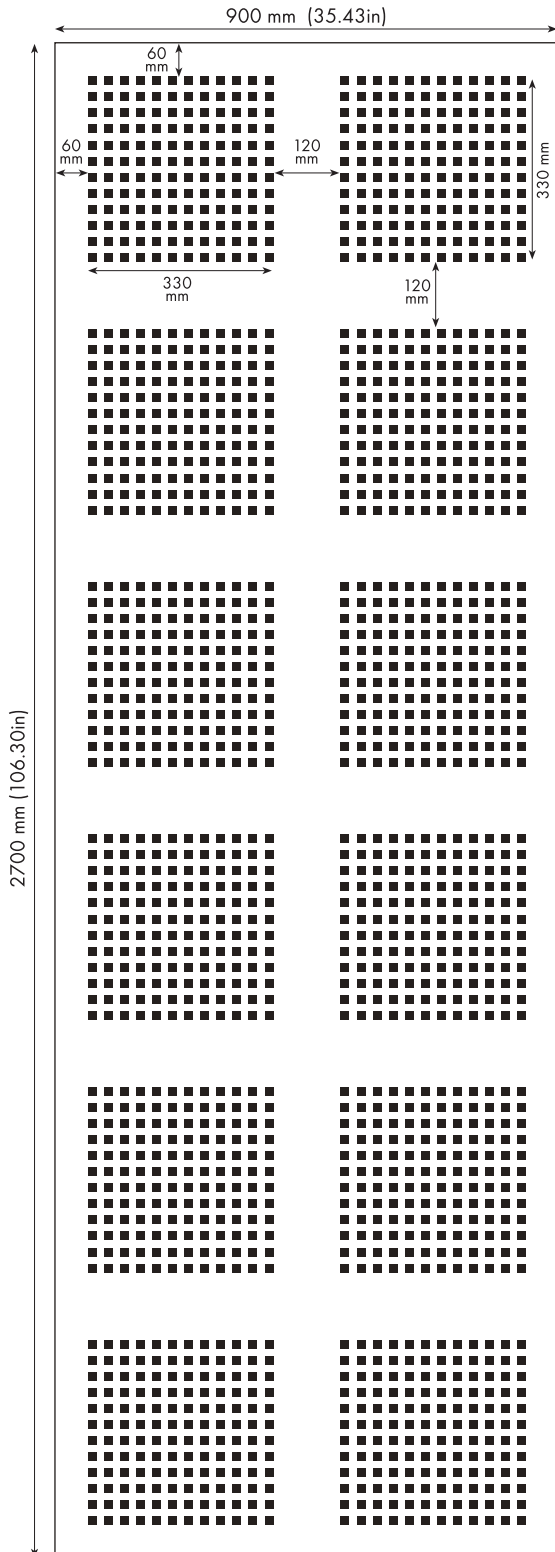


Q 1/3
2700mm
x 900mm
(~106.30"
x 35.43")

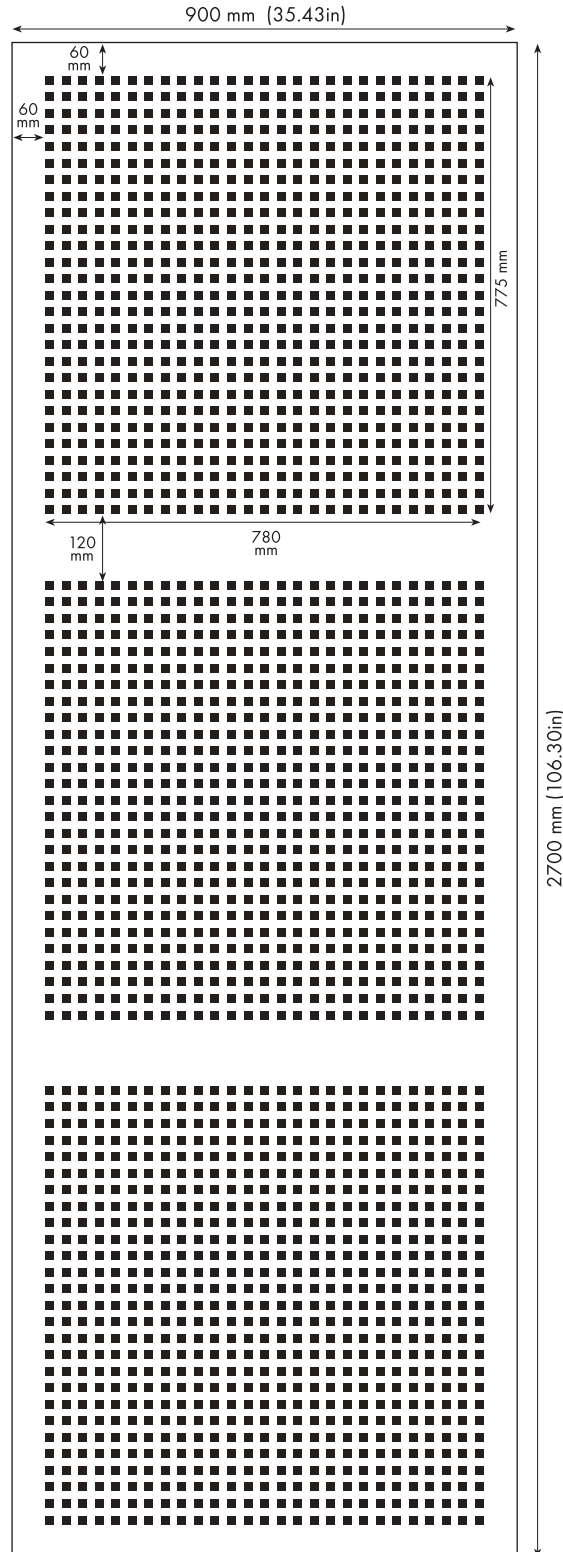


STRATUM SQUARE

Q 2/4 2400mm x 1200mm
(~94.49" x 47.24")

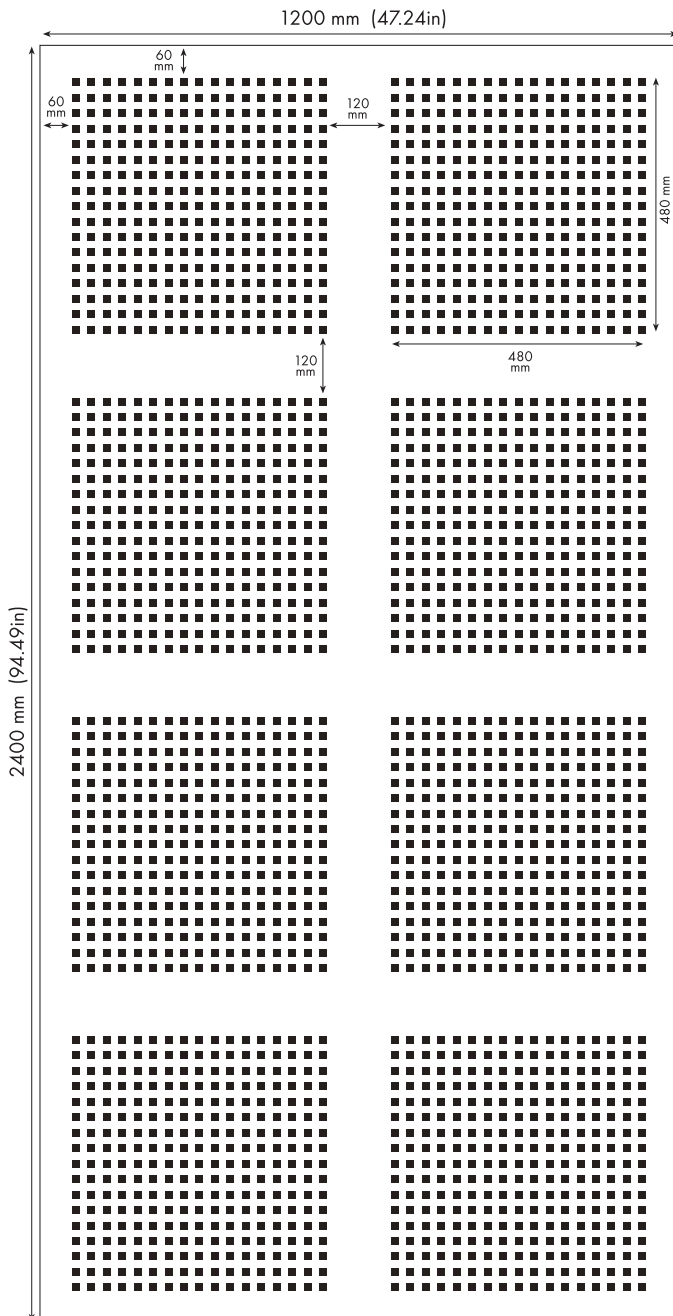

Q 4/8 2400mm x 1200mm
(~94.49" x 47.24")

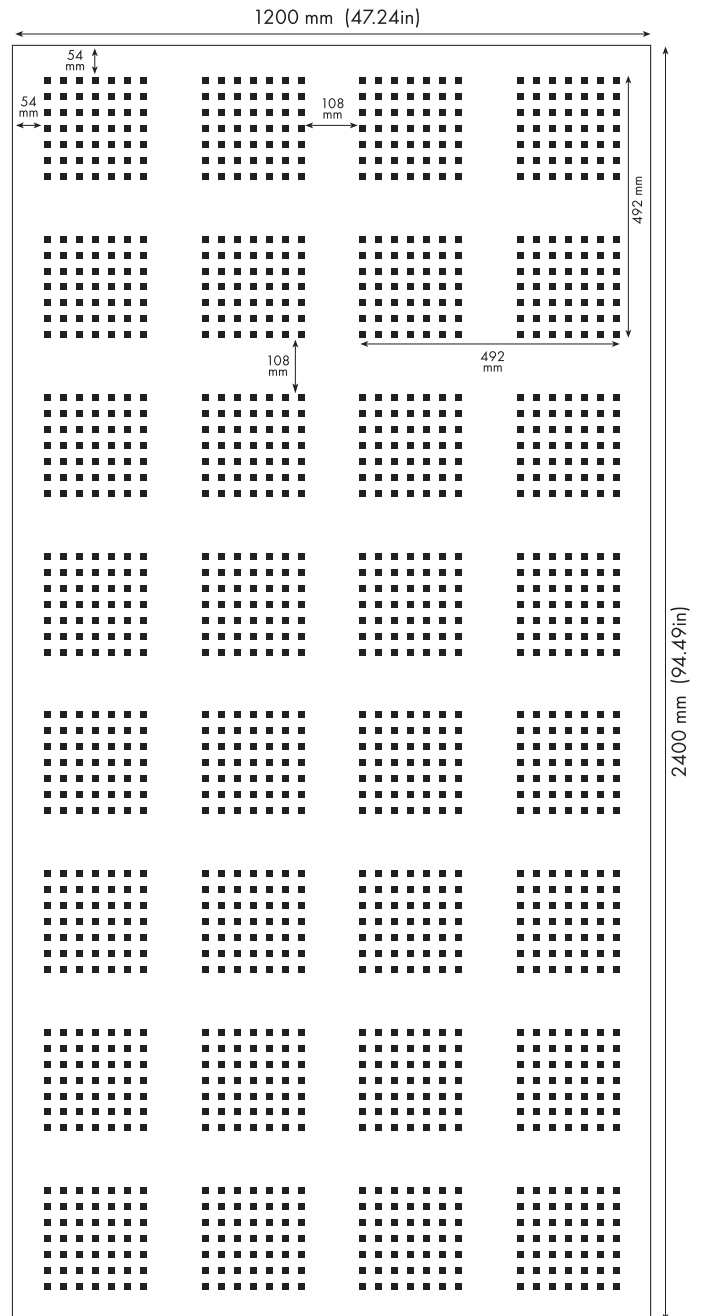

*Limited to stock on hand